
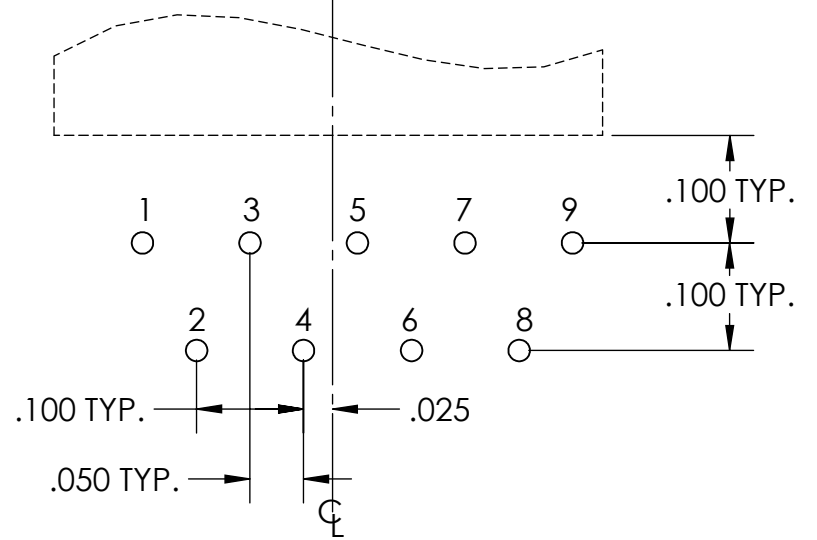
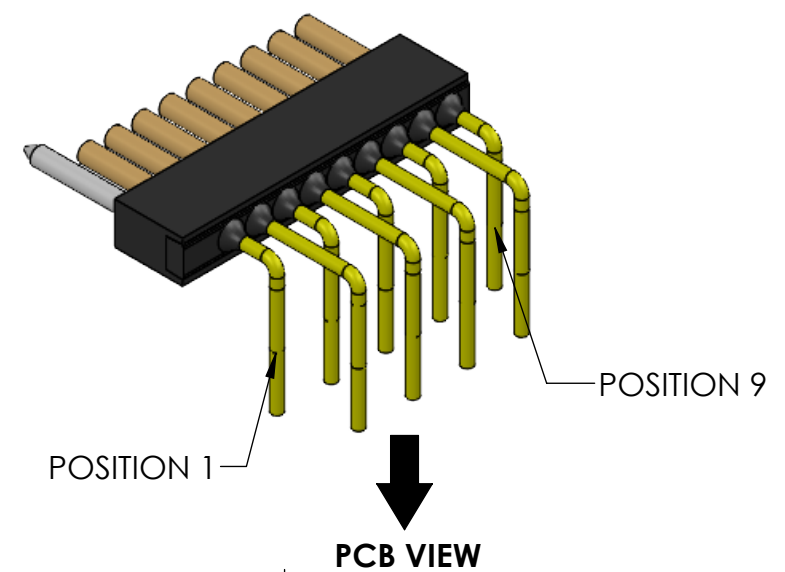


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	12/19/14	UMI5496	DW	DW
A	A	2/3/15	UMI5524	DW	DW
B	B	07/20/22	UMI8086	ND	DW

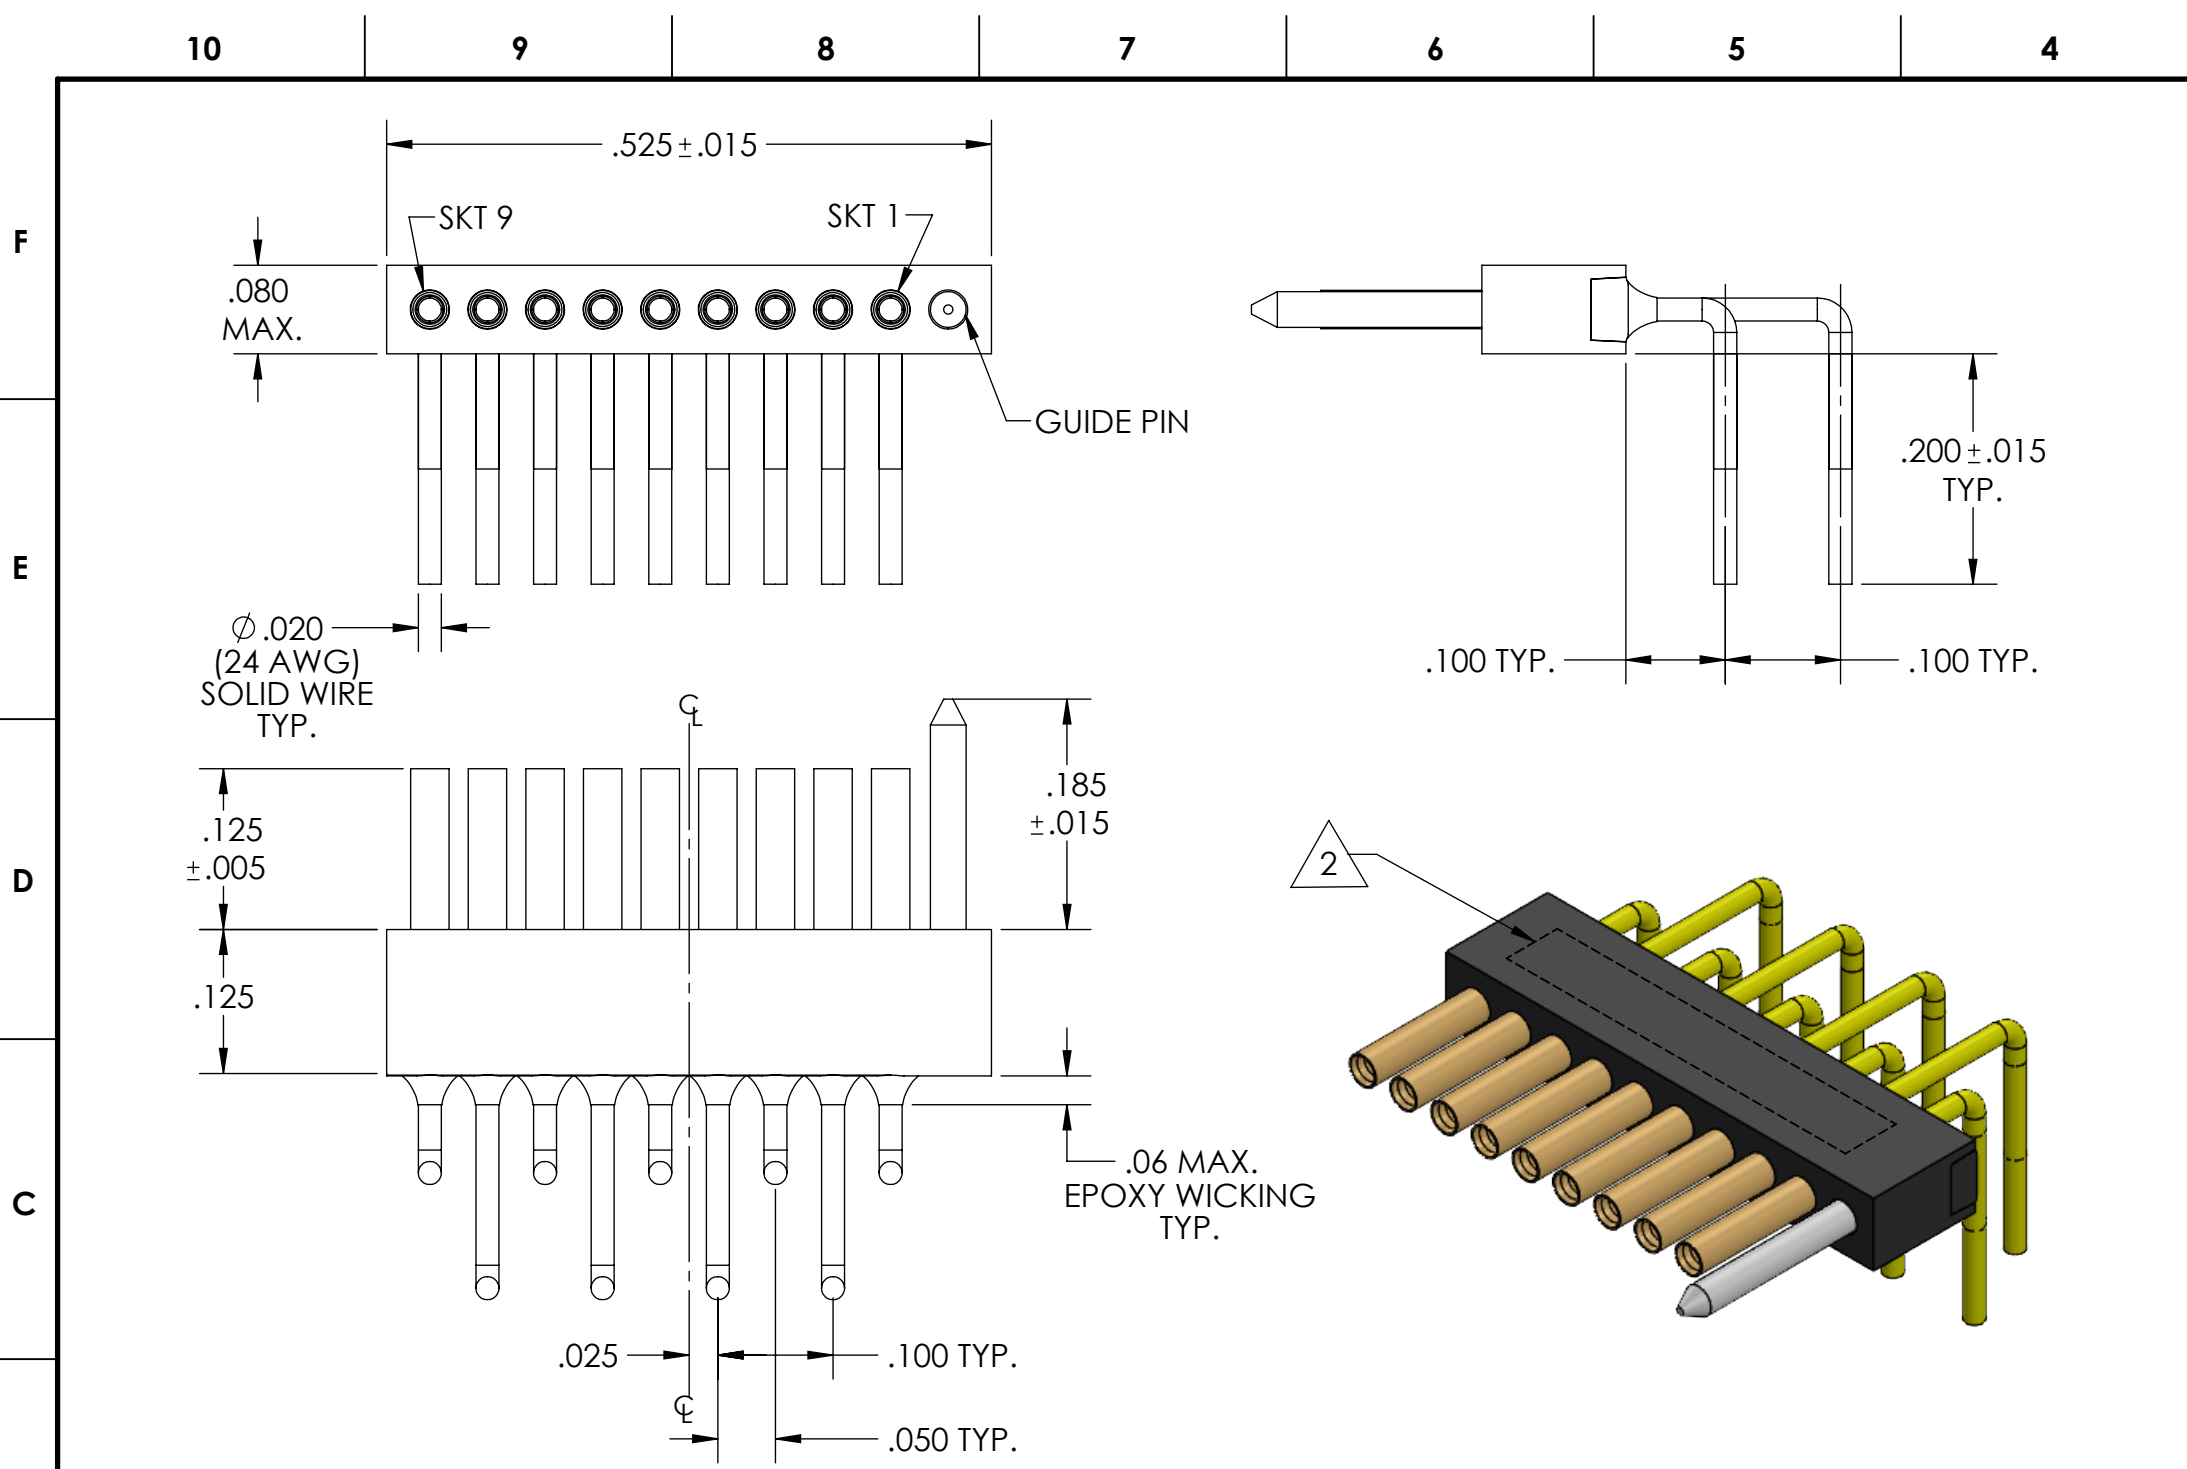

4. PERFORMANCE SPECIFICATIONS (AT AMBIENT TEMPERATURE):
 CURRENT RATING: 3 AMPS MAX.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 DWV: 600 VAC
 TEMPERATURE RATING: 200° C

3 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488
 24 AWG LEADS: C10200 COPPER ALLOY PER ASTM B49, GOLD PLATED PER ASTM B488 (.000010 MIN. THK.)
 GUIDE PIN: STAINLESS STEEL, 300 SERIES, PASSIVATED PER AMS-2700

2 MARKING: "UMI", DATE CODE ON PART. BAG AND TAG WITH UMI PART NUMBER.

1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE 6:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL C	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 12/19/14	TITLE: MICRO STRIP CIRCUIT CONNECTOR, SR09S1-L02-HT, HIGH-TEMP, .200 SPECIAL LENGTH		
MAJOR ▲	ULTI-MATE CAGE CODE 58967	CHECKED BY & DATE DW 12/19/14	MATERIAL: 3	ENG PROJECT #: E218	
NO SYMBOLS = MINOR DIMENSIONS		APPROVED BY & DATE DW 12/19/14	PART NO. 437092904	DRAWING NO. SD-437092904	
		CAD FILE NAME SD-437092904.SLDDRW	PART NO. 437092904	DRAWING NO. SD-437092904	SHEET NO. 1 of 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.					
					PART REV. A