
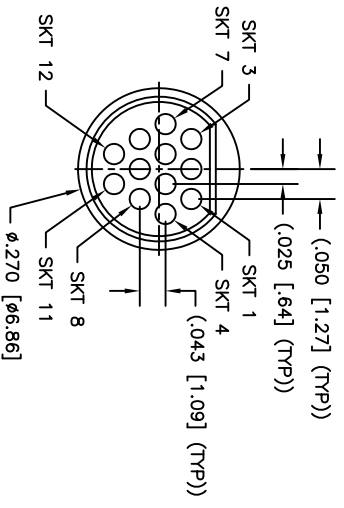


PART DWG		REV		DATE	ECN NO.	APP'D BY	REL BY
A	A	10/22/20		UM7581	T.POMBART	PER	
B	B	05/03/21		UM7745	T.POMBART	PER	

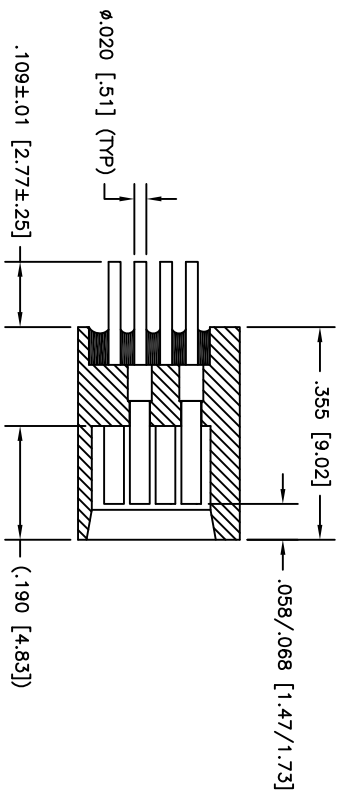

3. PERFORMANCE: MEETS OR EXCEEDS MB3513 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 3 AMPERE MAXIMUM
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 500 VDC
 CONTACT RESISTANCE: 8 MILLIOHMS MAX @ 2.5 AMPS

2. MATERIALS: INSULATOR: PPS PER MIL-M-24519 GST-40F, OR LCP (LIQUID CRYSTAL POLYMER)
 CONTACTS: BRASS ALLOY 210, GOLD PLATED PER ASTM B488
 LEADS: PURE TIN PLATED

1. MARKINGS: UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG
 NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
HAZAR =	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.010 ANGULAR ±2°	DRAWN BY & DATE S:1	B	⊙	
CRITICAL C/ =		PER 08-25-20			
SPC S =		CHECKED BY & DATE			
		SEE ECN			
		APPROVED BY & DATE			
		SEE ECN			
		CAD FILENAME	PART NO.	DRAWING NO.	
		SD-812041910.DWG	812041910	SD-812041910	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE			SHEET NO.
		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			1 OF 1
					PART REV
					B

