


PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV	ISSUE		T-POMBART	PER
-	12/30/16	UM16187		

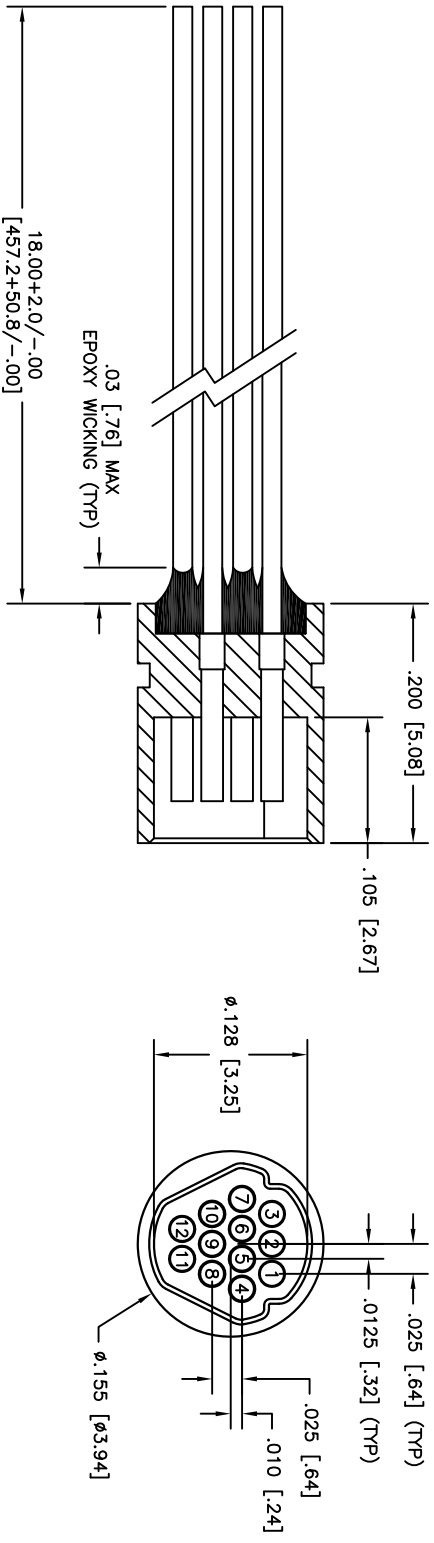

- 3. PERFORMANCE:** MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS  
 CONTACT RATING: 1 AMPERE MAXIMUM  
 DMV: 250 VAC  
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC  
 CONTACT RESISTANCE: 0.071 VOLT MAXIMUM DROP @ 1.0 AMPS (.071 OHMS)  
 W/6.00" OF WIRE LISTED BELOW, PER MIL-DTL-32139
- 2. MATERIALS:** INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F  
 CONTACT: BRASS ALLOY 260, GOLD PLATED PER ASTM B488  
 LEADS: 30 AWG, SAE-AS22759/33, WHITE
- 1. MARKINGS:** UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG
- NOTES:** UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
HAZAR =	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.010 ANGULAR ±2°	DRAWN BY & DATE	B		
CRITICAL C/S =		PER 12-28-16			
SPC S =		CHECKED BY & DATE			
		SEE ECN			
		APPROVED BY & DATE			
		SEE ECN			
		CAD FILENAME	PART NO.	DRAWING NO.	
		SD-822061320.DWG	822061320	SD-822061320	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE			
		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		ULTI-MATE Connector Inc.			
		SHEET NO. 1 OF 1			
		REV -			