


PART DWG	REV	DATE	ECN NO.	APP'D BY	REL BY
-	-	02/13/12	UM4570	T.POMBARAT	PER

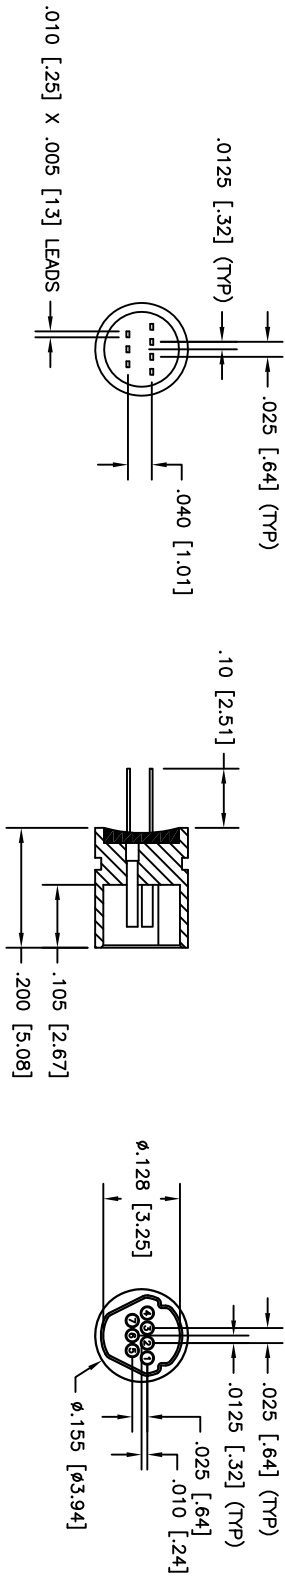

- PERFORMANCE: MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 1 AMPERE MAXIMUM
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACT RESISTANCE: 0.021 VOLT MAXIMUM DROP @ 1.0 AMPS (.021 OHMS)
- MATERIALS: INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F
 CONTACTS: BRASS ALLOY 735, GOLD PLATED PER ASTM B488
 LEADS: SN/PB PLATED
- MARKINGS: BAG OR TAG WITH UMI, DATE CODE, UMI P/N AS SPACE PERMITS

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR = MINOR = CRITICAL =	GENERAL TOLERANCES: 3 PLACE $\pm .005$ 2 PLACE $\pm .010$ ANGULAR $\pm 2^\circ$	5:1	B		
SPC	Uti+ - Mate CAGE CODE 58967	DRAWN BY & DATE	PER	CHECKED BY & DATE	SEE ECN
S		SD-822090002.DWG	02-13-12	APPROVED BY & DATE	SEE ECN
=		CAD FILENAME	PART NO.	DRAWING NO.	SHEET NO.
		SD-822090002.DWG	822090002	SD-822090002	1 OF 1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO UTI-MATE			REV
		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			-

Uti+ - Mate Connector Inc.