
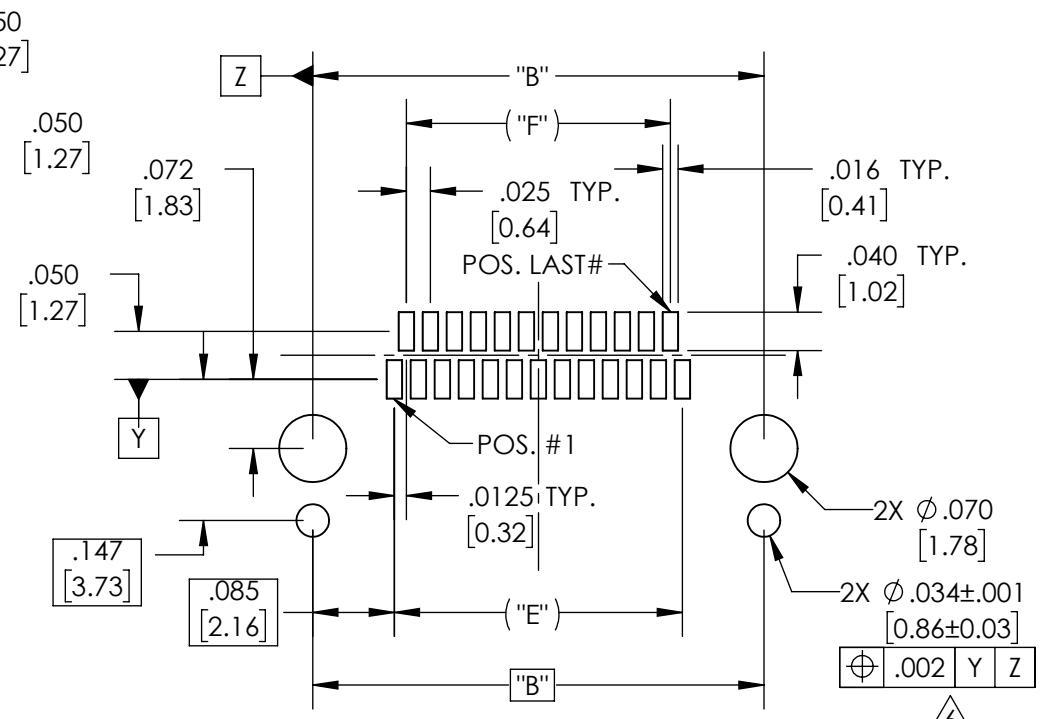


REVISIONS					
PART REV.	DWG. ISSUE	DATE	ECN NO.	APPVD. BY	REL. BY
B	D	02/18/2022	UMI7962	PA	DW
B	E	08/04/2022	UMI8101	PA	DW

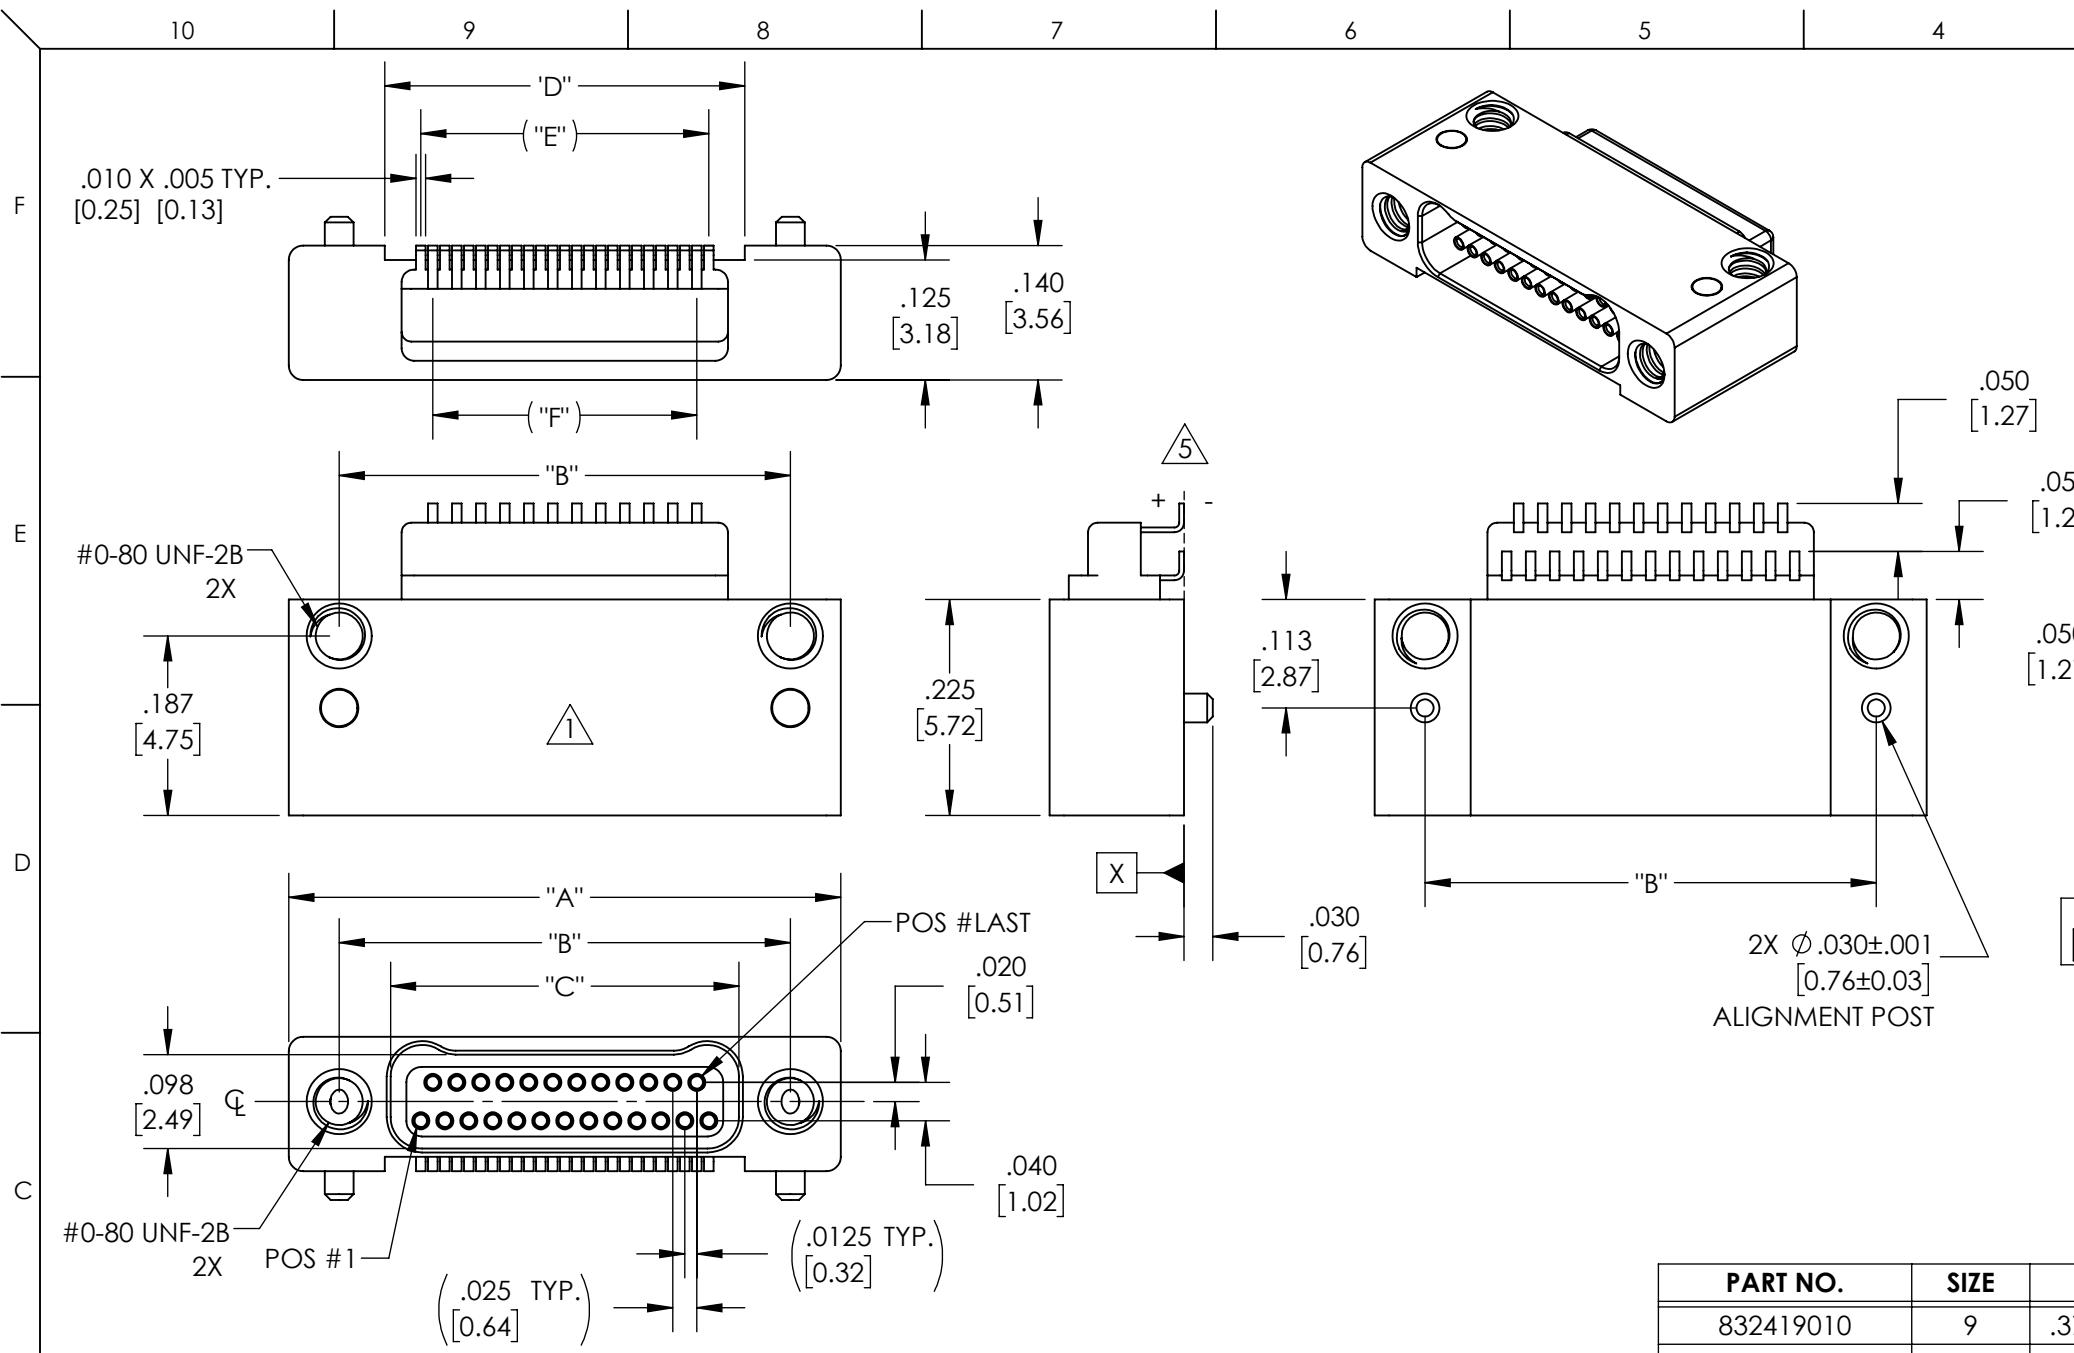

PART NO.	SIZE	"A"	"B"	"C"	"D"	"E"	"F"
832419010	9	.375 [9.52]	.270 [6.86]	.163 [4.14]	.175 [4.44]	.100 [2.54]	.075 [1.90]
832429010	15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.250 [6.35]	.175 [4.44]	.150 [3.81]
832439010	21	.525 [13.33]	.420 [10.67]	.313 [7.95]	.325 [8.25]	.250 [6.35]	.225 [5.71]
832449010	25	.575 [14.60]	.470 [11.94]	.363 [9.22]	.375 [9.52]	.300 [7.62]	.275 [6.98]
832459010	31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.450 [11.43]	.375 [9.52]	.350 [8.89]
832469010	37	.725 [18.41]	.620 [15.75]	.513 [13.03]	.525 [13.33]	.450 [11.43]	.425 [10.79]
832479010	51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.700 [17.78]	.625 [15.87]	.600 [15.24]
832489010	65	1.075 [27.30]	.970 [24.64]	.863 [21.92]	.875 [22.22]	.800 [20.32]	.775 [19.68]

- 6. ALIGNMENT POST HOLE TO BE NON-PLATED AND OPTICALLY DRILLED
 - 5. LEAD TOLERANCE: LEADS TO BE CO-PLANAR WITHIN +.004/-0.001 FROM SURFACE [X]
 - 4. PERFORMANCE: MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS
CURRENT RATING: 1 AMP MAX.
DWV: 250 VAC
INSULATION RESISTANCE: 5000 M Ω MIN. @ 100 VDC
CONTACT RESISTANCE: 0.021 VOLT MAX. DROP @ 1.0 AMP (.021 Ω)
 - 3. INTERMATEABILITY: INTERFACE DIMENSIONS PER MIL-DTL-32139
 - 2. MATERIALS:
SHELL: 6061-T6 ALUMINUM PER AMS-QQ-A200/8, NICKEL PLATED PER AMS2404
INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F, COLOR: BLACK
CONTACTS: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
LEADS: SN/PB PLATED
ALIGNMENT POST: 300 SERIES STAINLESS STEEL, PASSIVATED
 - 1. MARKINGS: UMC, UMC P/N, DATE CODE, W/O NO. AS SPACE PERMITS OTHERWISE ON BAG OR TAG
- NOTES: UNLESS OTHERWISE SPECIFIED**

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOL = MINOR DIMENSION	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 5:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	DRAWN BY & DATE PA 02/18/2022	TITLE NANO-D, DUAL ROW CONNECTOR FEMALE, SIZE XX, CNM28LXX-2S071-S01 1		MATERIAL [Symbol]	ENG PROJECT # N/A
		CHECKED BY & DATE SEE ECN	APPROVED BY & DATE SEE ECN	CAD FILENAME SD-832469010.slddrw	PART NO. SEE TABLE	DRAWING NO. SD-832469010
					SHEET NO. 1 OF 1	PART REV. B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

