

10

9

8

7

6

5


4

3


2

SD-834111077

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	7/6/20	UMI7519	DU	DW

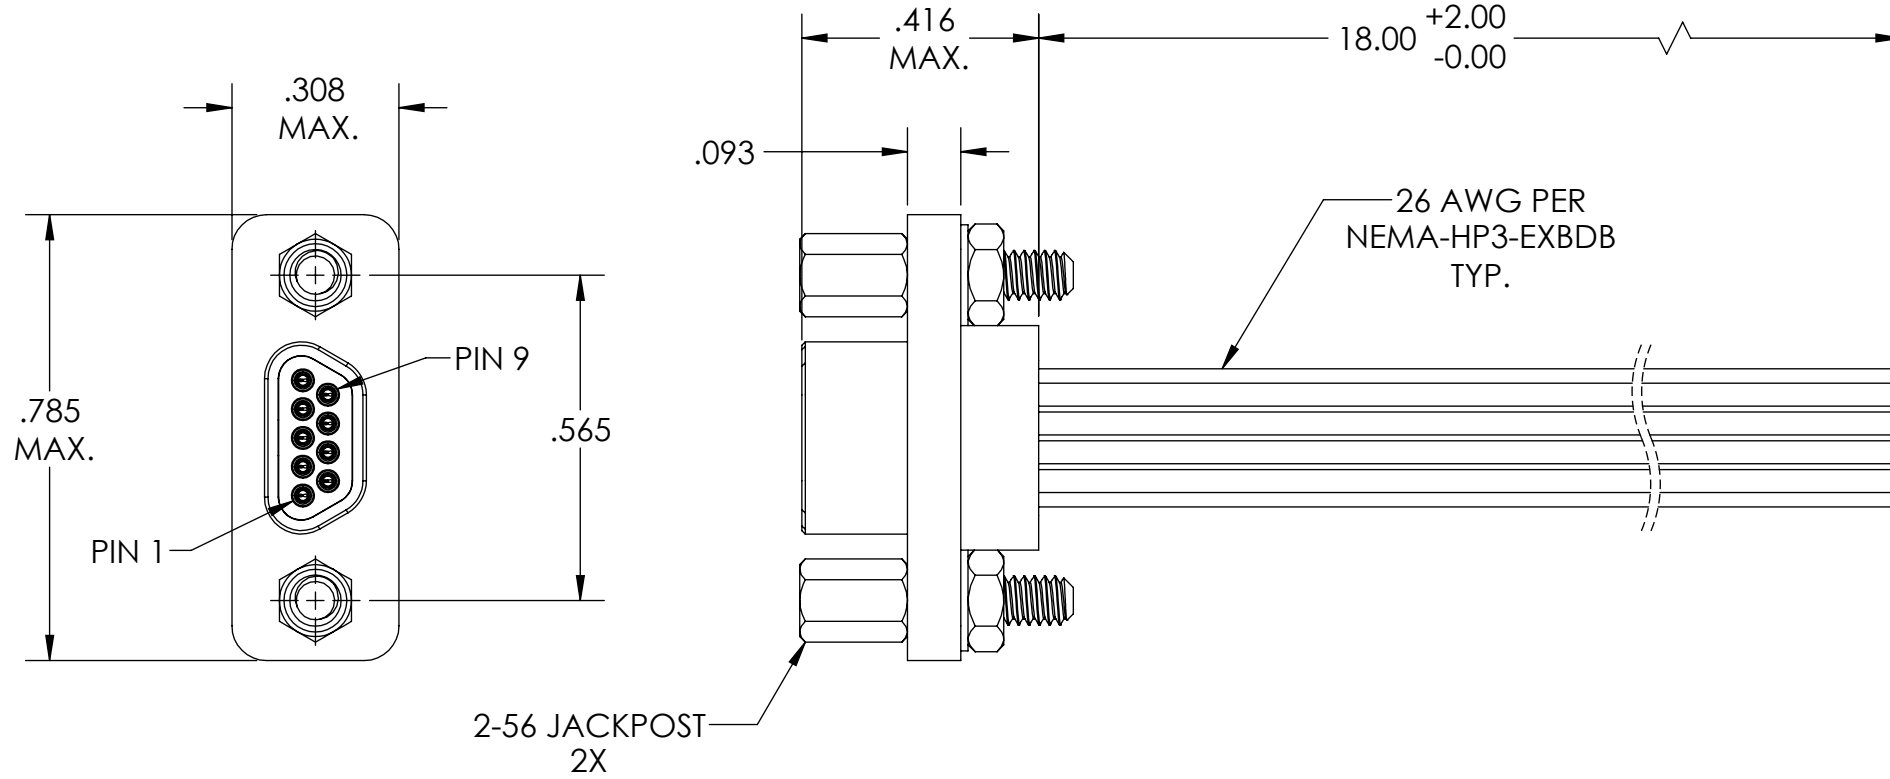

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY

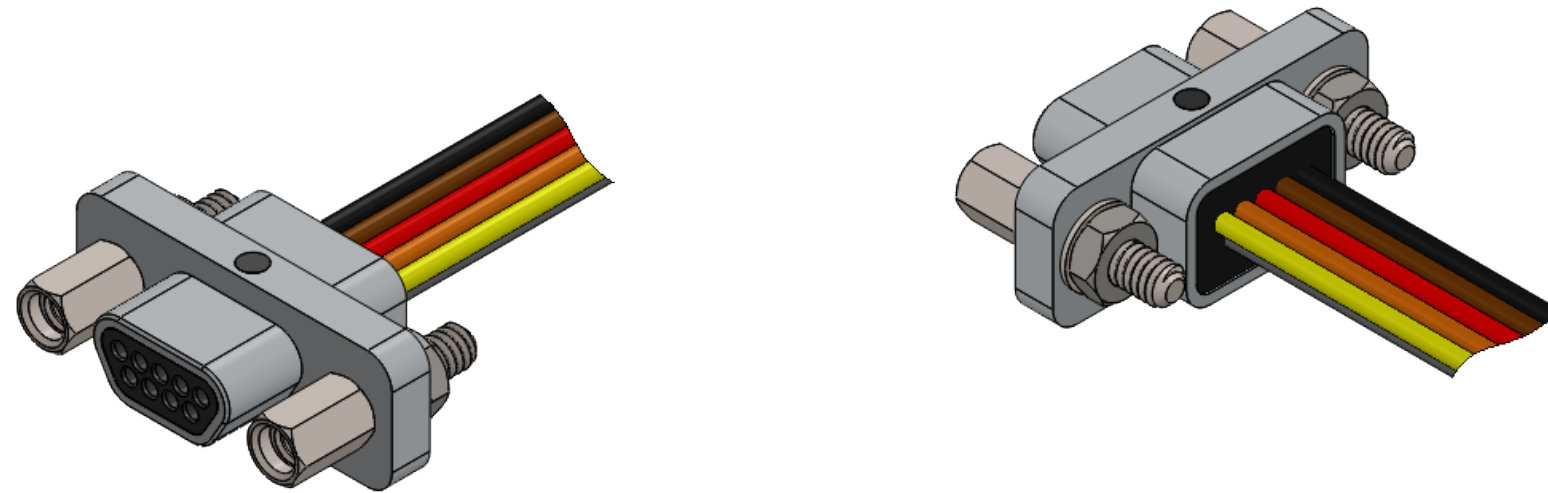

- 5. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.
- 4. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMP MAX.
DWV: 600 VAC
TEMPERATURE RATING: -55°C TO 125°C

3 MATERIALS:
SHELL: 6061-T6 ALUMINUM PER AMS-QQ-A200/8, NICKEL PLATED PER AMS-2404
INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
26 AWG LEADS: PER NEMA-HP3-EXBDB, COLOR CODE PER MIL-STD-681
HARDWARE: PASIVATED STAINLESS STEEL IAW MIL-DTL-83513/5

- 2. MARKING: "UMI", DATE CODE, UMI PART NUMBER, UMI WORK ORDER NUMBER
- 1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE 3:1	DWG SIZE B	THIRD ANGLE PROJECTION 	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 7/6/20	TITLE: MICRO-D CONNECTOR ASSEMBLY, MR09P07-26E5-18.0-S01			
	ULTI-MATE CAGE CODE 58967	CHECKED BY & DATE DW 7/6/20	MATERIAL: 3		ENG PROJECT #: E439	 Connector Inc.
		APPROVED BY & DATE DW 7/6/20	PART NO. 834111077	DRAWING NO. SD-834111077	SHEET NO. 1 of 1	
		CAD FILE NAME SD-834111077.slddrw	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			