


| | | | | |
|---------------------------|---------|----------|----------|--------|
| PART / DWG REV / ISSUE | DATE | ECN NO. | APPVD BY | REL BY |
| - / - | 10-4-10 | UMI 4187 | | |



| | | | | | |
|-----------------|---|---|--|------------------------|--|
| QUALITY SYMBOLS | UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES | SCALE | DWG SIZE | THIRD ANGLE PROJECTION | REVISE ON CAD ONLY |
| | MAJOR = | GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2° | NONE DW 10-4-10 | | MICRO-D PLUG, SIZE 31, 26 AWG WIRE, 36, MR31P0-26E5-36.0-S01 |
| CRITICAL = | SPC = | | APPROVED BY & DATE | MATERIAL: | |
| | UMI-Mate CAGE CODE | | CAD FILENAME | PART NO. | DRAWING NO. |
| | 58967 | | SD-834151530.DGN | 834151530 | SD-834151530 |
| | | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. | | |
| | | | | | SHEET NO. 1 OF 1 |
| | | | | | REV - |

2 MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER AMS-00-A200/8, NICKEL PLATED PER AMS 2404
 INSULATOR: PPS PER MIL-M-24519 GST-40F
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM-B194, GOLD PLATED PER ASTM B488-01
 HARDWARE: 300 SERIES STAINLESS STEEL, PASSIVATED PER AMS 2700
 1. MARKING: UMI, DATE CODE, UMI/P/N.
 NOTES: UNLESS OTHERWISE SPECIFIED.

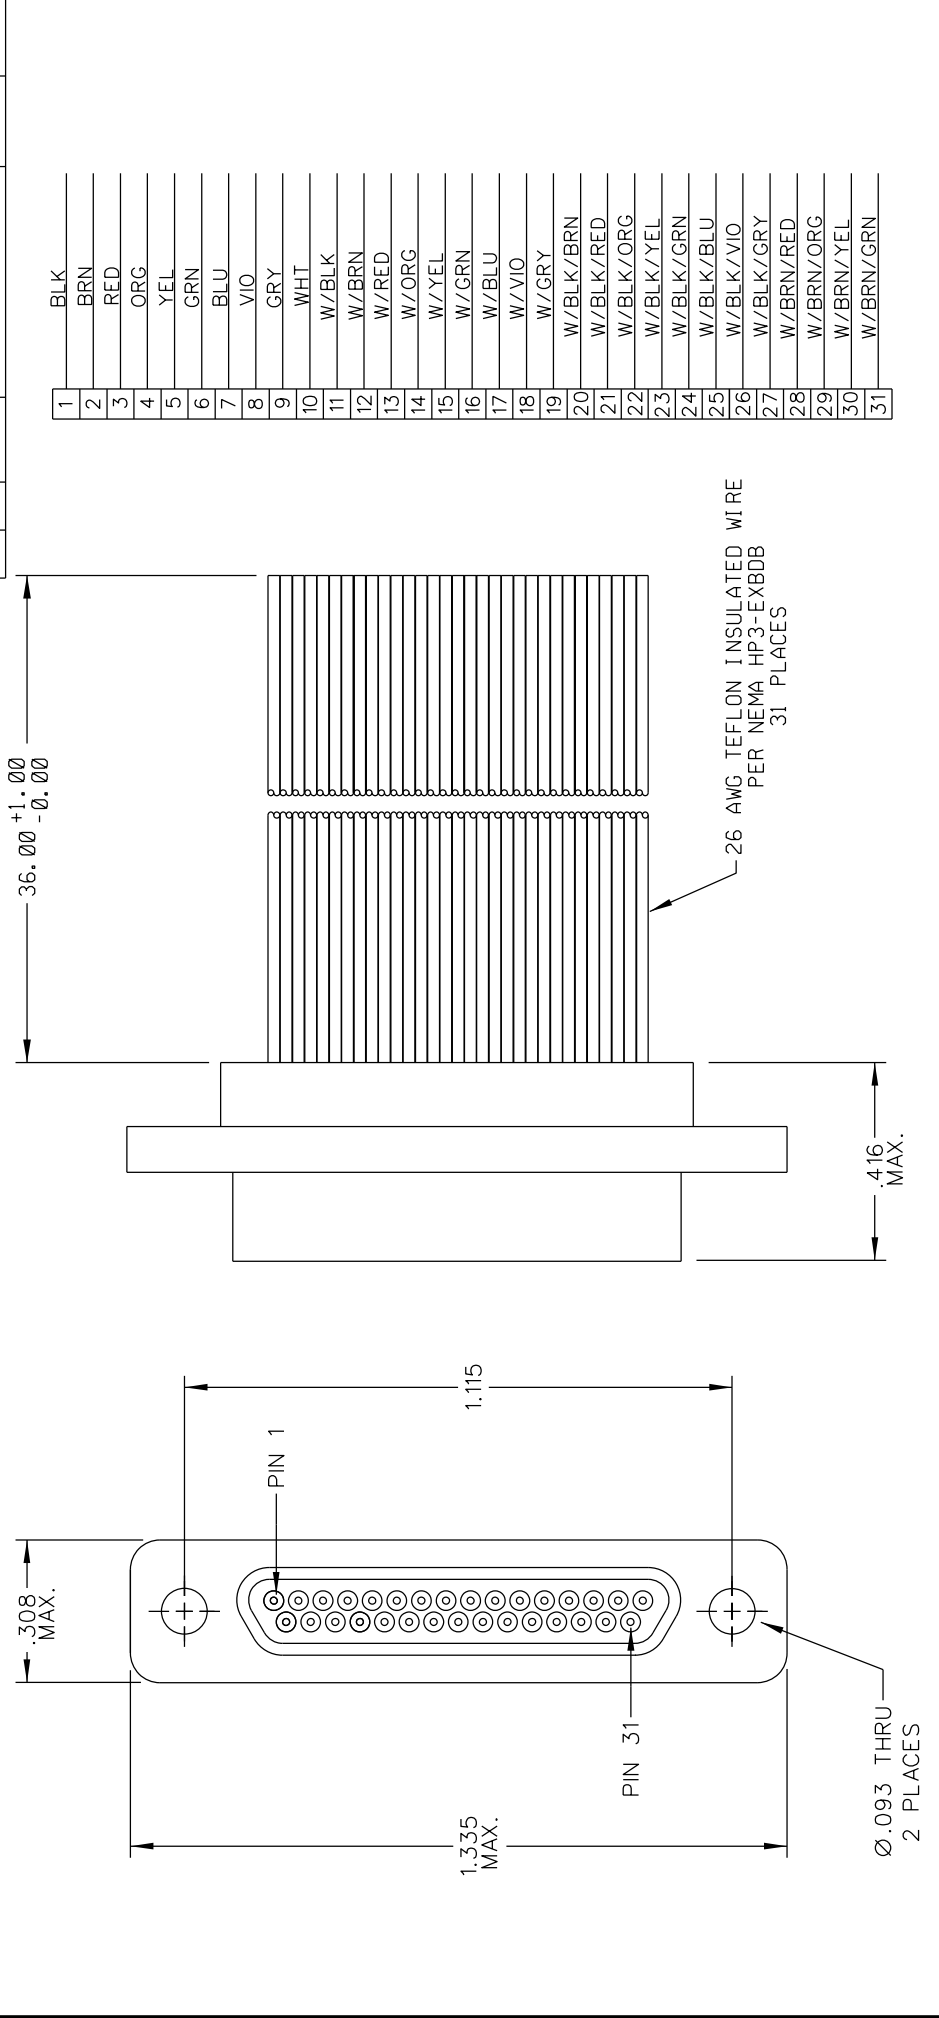