
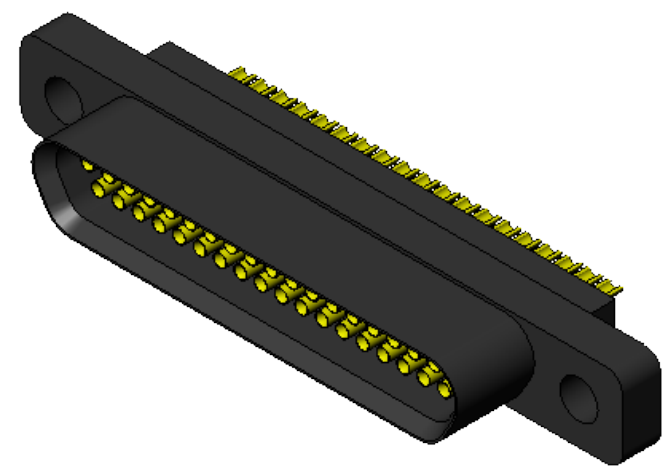
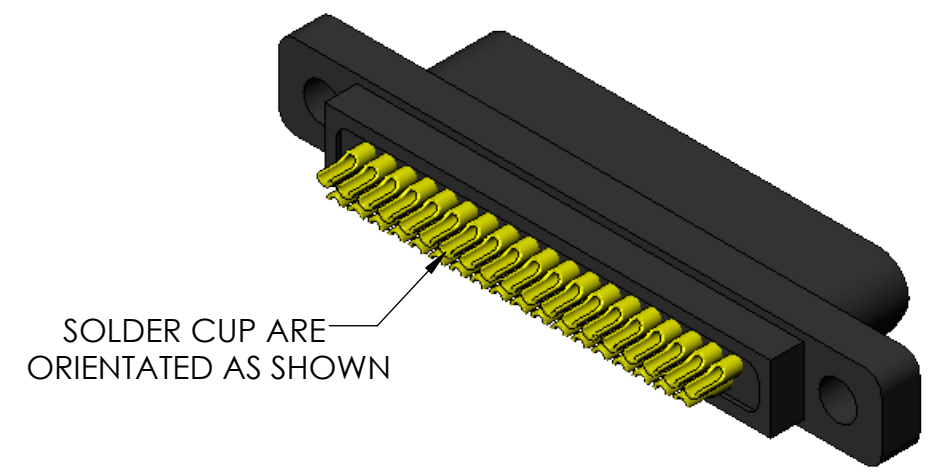


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	4/27/18	UMI6750	DW	DW

F
E
D
C
B
A

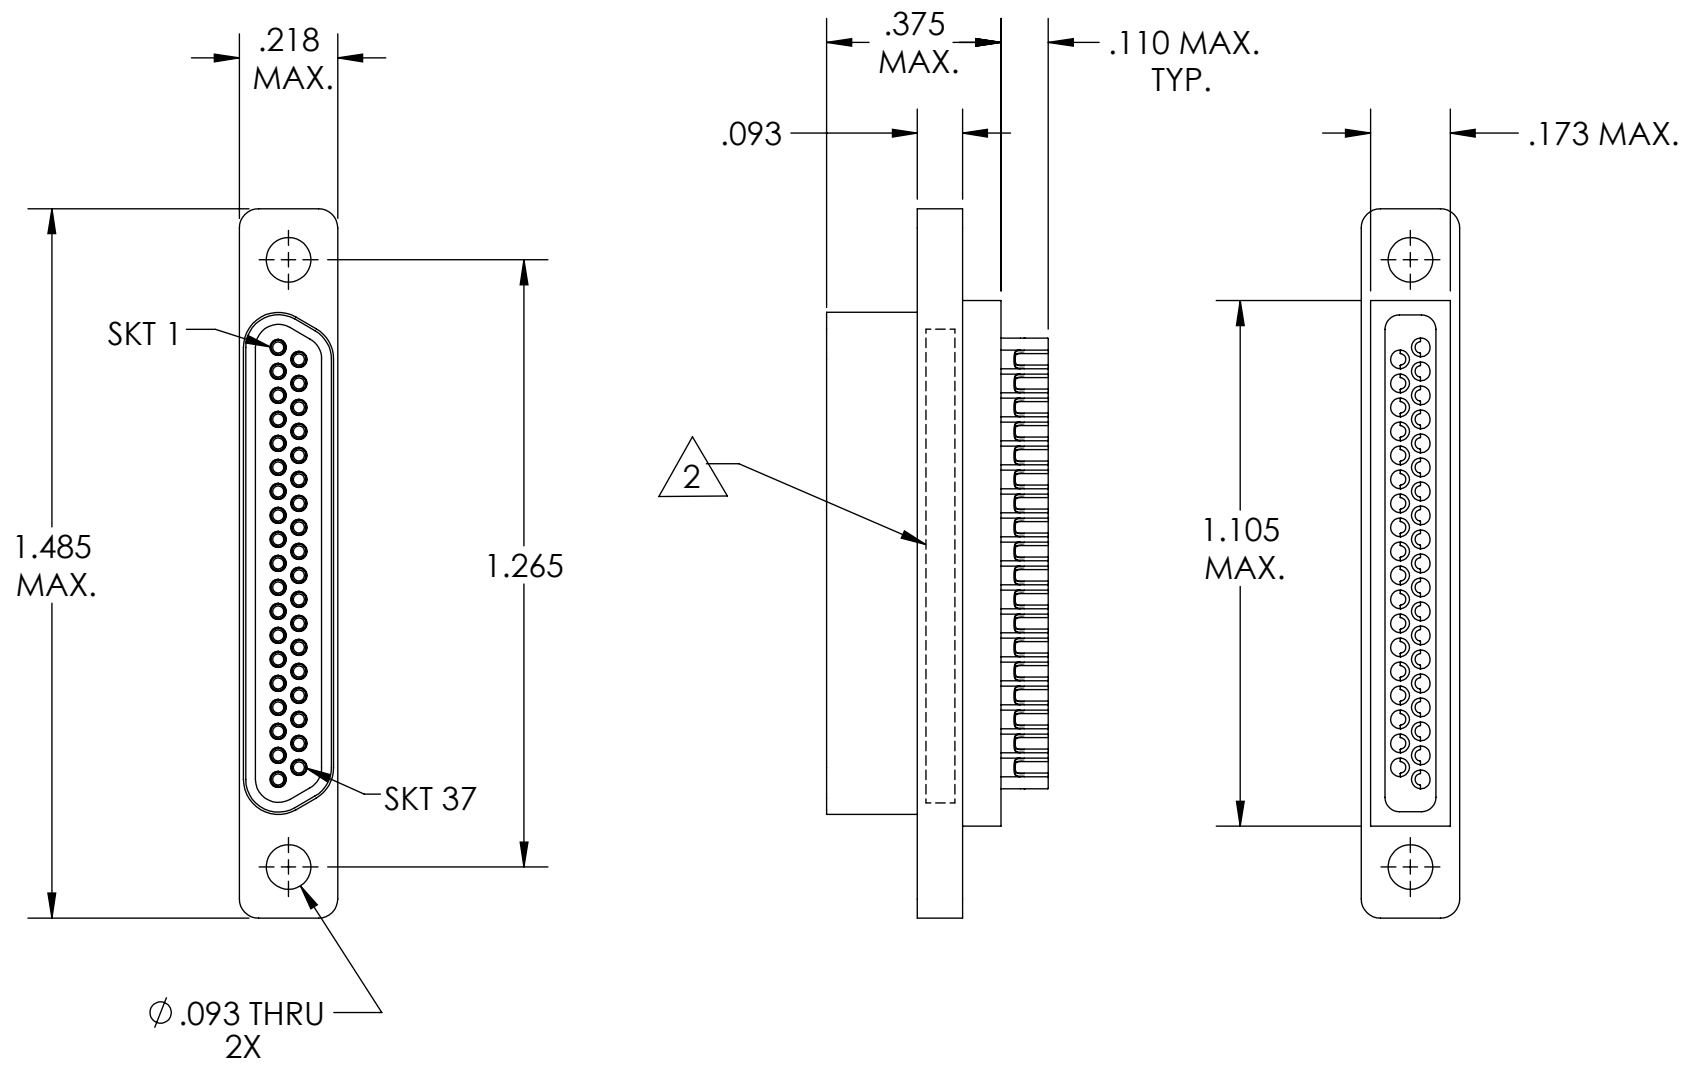

5. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.

4. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMPS MAX.
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
DWV: 600 VAC
TEMPERATURE RATING: 125° C

3 MATERIALS:
SHELL: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
SOCKET SOLDER CUP CONTACTS: C31400 BRONZE ALLOY PER ASTM B140, GOLD PLATED PER ASTM B488

2 MARKING: "UMI", DATE CODE, UMI PART NUMBER, UMI WORK ORDER NUMBER

1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 4/27/18		TITLE: MICRO-D CONNECTOR ASSEMBLY, PR37T0, LOW-PROFILE PLASTIC CONNECTOR, SOLDER CUPS		
		CHECKED BY & DATE DW 4/27/18		MATERIAL: 3	ENG PROJECT #: NONE	
		APPROVED BY & DATE DW 4/27/18		PART NO. 834668000		DRAWING NO. SD-834668000
	ULTI-MATE CAGE CODE 58967	CAD FILE NAME SD-834668000.SLDDRW		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		

