


REVISIONS

PART REV.	DWG. ISSUE	DATE	ECN NO.	APPVD. BY	REL. BY
N/A	-	01/04/2016	RELEASED	DW	DW
-	-	11/07/18	UMI6940	VL	DW

COLOR CODE

1	BLK	27	W/BLK/GRY
2	BRN	28	W/BRN/RED
3	RED	29	W/BRN/ORG
4	ORG	30	W/BRN/YEL
5	YEL	31	W/BRN/GRN
6	GRN	32	W/BRN/BLU
7	BLU	33	W/BRN/VIO
8	VIO	34	W/BRN/GRY
9	GRY	35	W/RED/ORG
10	WHT	36	W/RED/YEL
11	W/BLK	37	W/RED/GRN
12	W/BRN	38	W/RED/BLU
13	W/RED	39	W/RED/VIO
14	W/ORG	40	W/RED/GRY
15	W/YEL	41	W/ORG/YEL
16	W/GRN	42	W/ORG/GRN
17	W/BLU	43	W/ORG/BLU
18	W/VIO	44	W/ORG/VIO
19	W/GRY	45	W/ORG/GRY
20	W/BLK/BRN	46	W/YEL/GRN
21	W/BLK/RED	47	W/YEL/BLU
22	W/BLK/ORG	48	W/YEL/VIO
23	W/BLK/YEL	49	W/YEL/GRY
24	W/BLK/GRN	50	W/GRN/BLU
25	W/BLK/BLU	51	W/GRN/VIO
26	W/BLK/VIO		

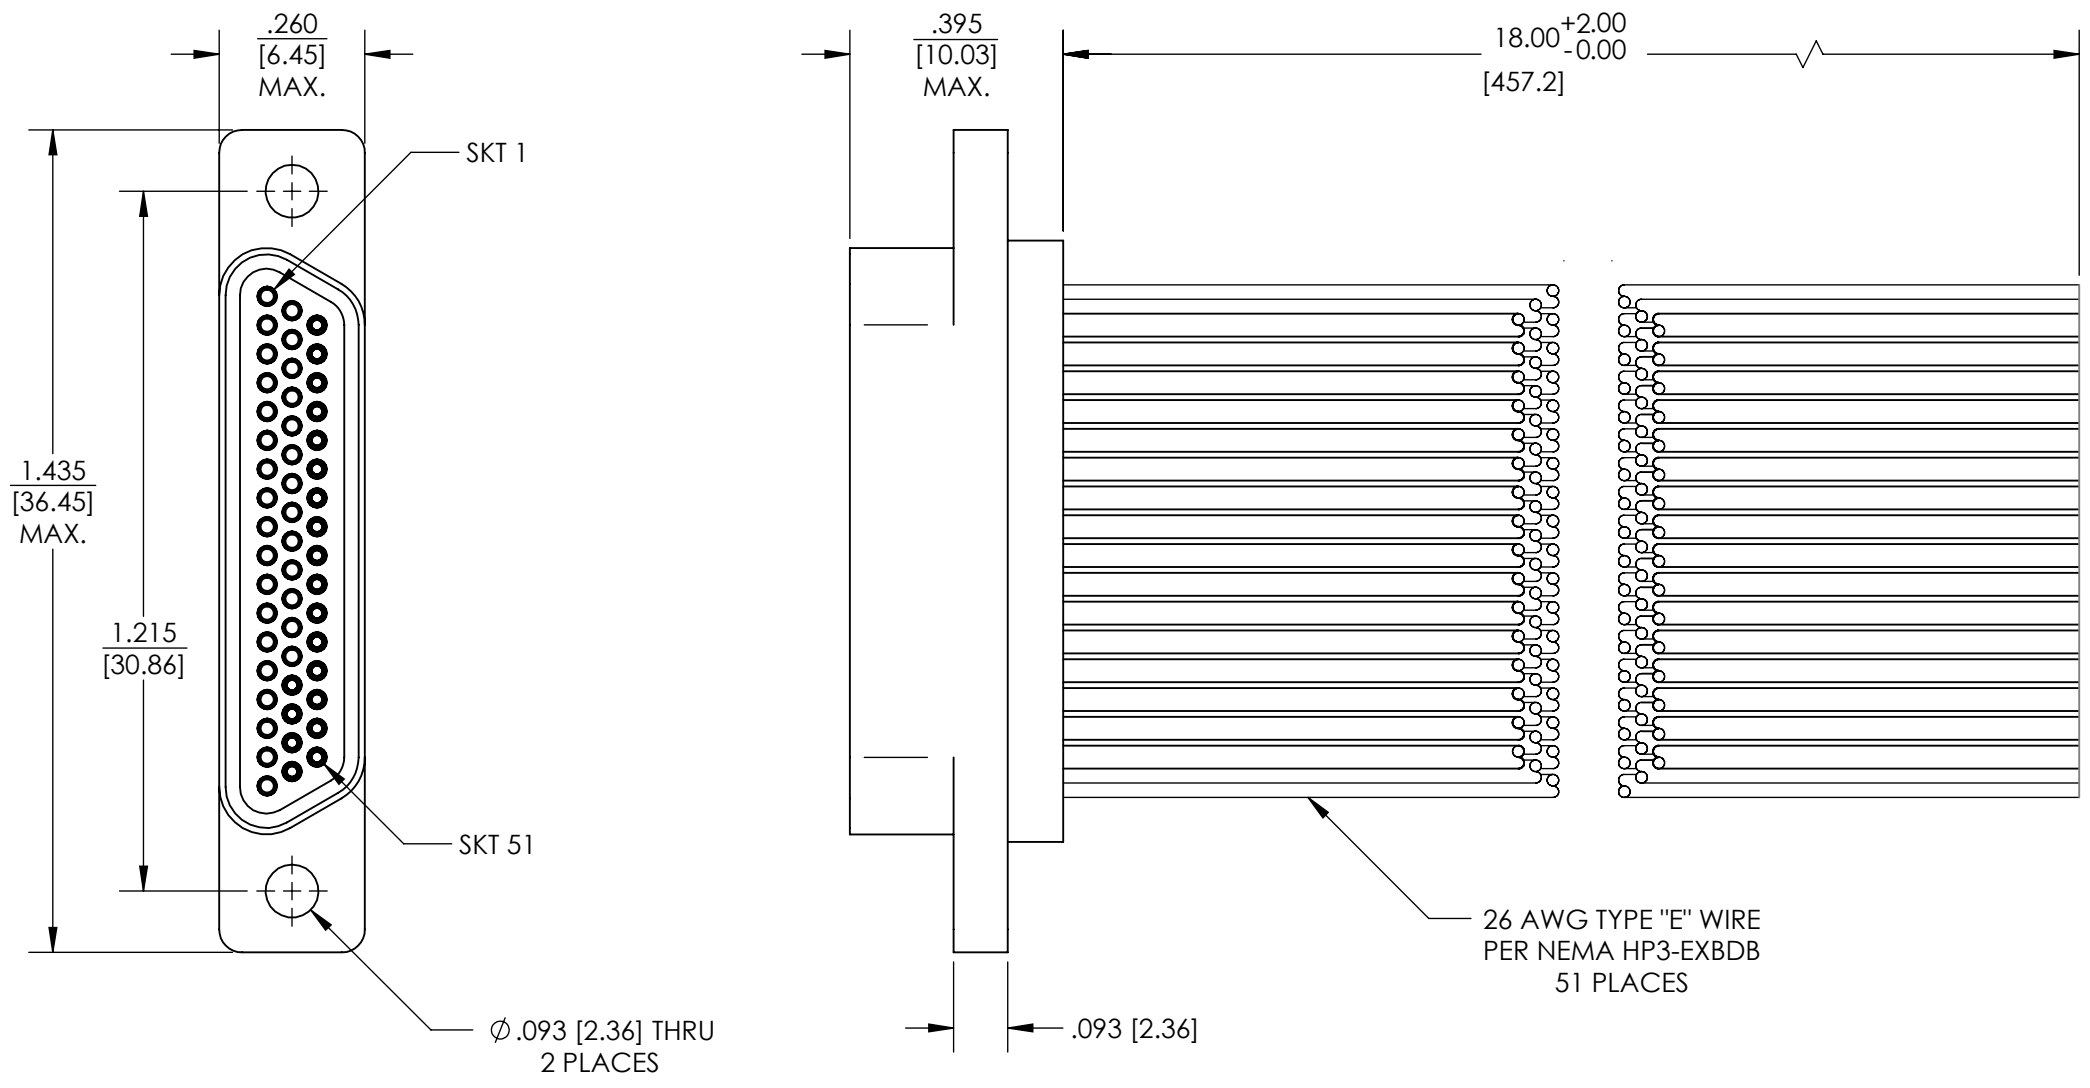

**MATERIALS:**  
 INSULATOR/BODY: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK  
 SOCKET CONTACTS: C21000 BRASS ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488

2. MARKINGS: "UMI", UMI DATE CODE, UMI P/N, AND WORK ORDER NO.  
 1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	<b>UNLESS SPECIFIED:</b> ALL DIMENSIONS IN INCHES	SCALE 3:1	DWG SIZE B	THIRD ANGLE PROJECTION	<b>REVISE ON CAD ONLY</b>
CRITICAL	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE VL 11/07/2018	TITLE MICRO-D WIRED CONNECTOR, RECEPTACLE (SOCKETS), 3 ROW, 51 POSITION PR51-3S0-26E5-18.0		
MAJOR	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE THE LATEST REVISION IN EFFECT	CHECKED BY & DATE SEE ECN	MATERIAL		
NO SYMBOL = MINOR DIMENSION	Ulti-Mate CAGE CODE <b>58967</b>	APPROVED BY & DATE SEE ECN	ENG PROJECT #		
		CAD FILENAME SD-834678070.slddrw	PART NO. 834678070	DRAWING NO. SD-834678070	SHEET NO. <b>1 OF 1</b>
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			PART REV. N/A

