



PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	12/14/15	UMI5828	DW	DW

F
E
D
C
B
A

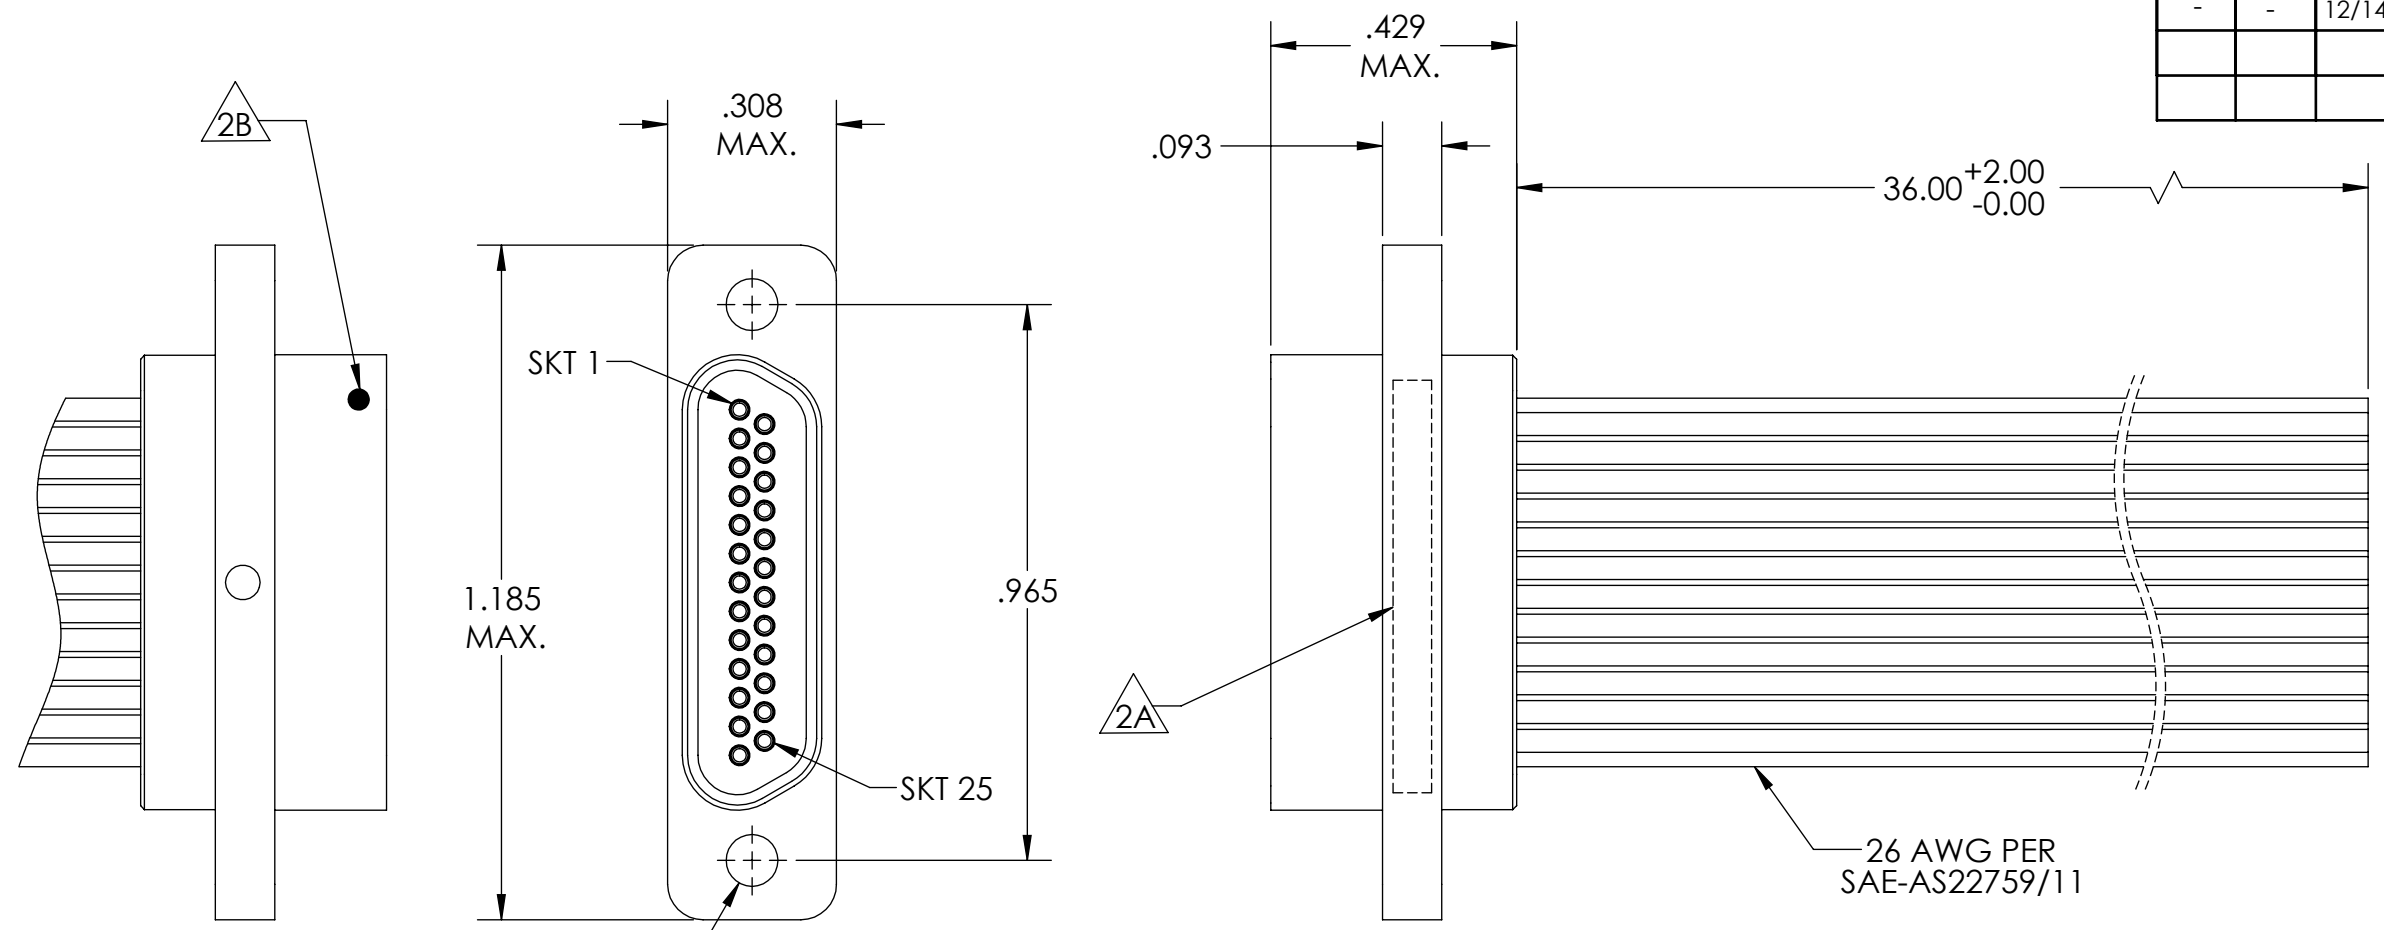

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY
10	WHT
11	BLK
12	BRN
13	RED
14	ORG
15	YEL
16	GRN
17	BLU
18	VIO
19	GRY
20	WHT
21	BLK
22	BRN
23	RED
24	ORG
25	YEL

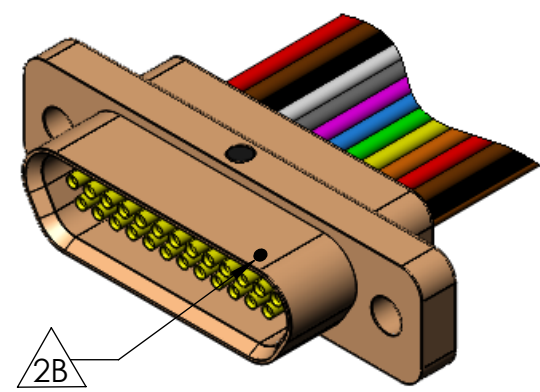

4. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3 AMPS MAX.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 DWV: 600 VAC
 TEMPERATURE RATING: 125° C

3 MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER AMS-QQ-A200/8, CADMIUM PLATED PER AMS-QQ-P-416
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 SOCKET CONTACT: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488
 WIRE: 26 AWG PER SAE-AS22759/11-26, REPEATING 10 COLOR CODE
 INTERFACIAL SEAL: FLUOROSILICONE PER MIL-R-25988

2. MARKING: 2A "UMI", DATE CODE, UMI PART NUMBER "M83513/04-D04C".
 2B A DOT INDICATING POSITION 1.

1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE 3:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 12/14/15		TITLE: MICRO-D CONNECTOR ASSEMBLY, M83513/04-D04C		
		CHECKED BY & DATE DW 12/14/15		MATERIAL: 3	ENG PROJECT #: NONE	
		APPROVED BY & DATE DW 12/14/15			SHEET NO. 1 of 1	
	ULTI-MATE CAGE CODE 58967		CAD FILE NAME SD-835240040.SLDDRW	PART NO. 835240040	DRAWING NO. SD-835240040	PART REV. -
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						

