


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	5/8/18	UMI6763	DW	DW

F
E
D
C
B
A

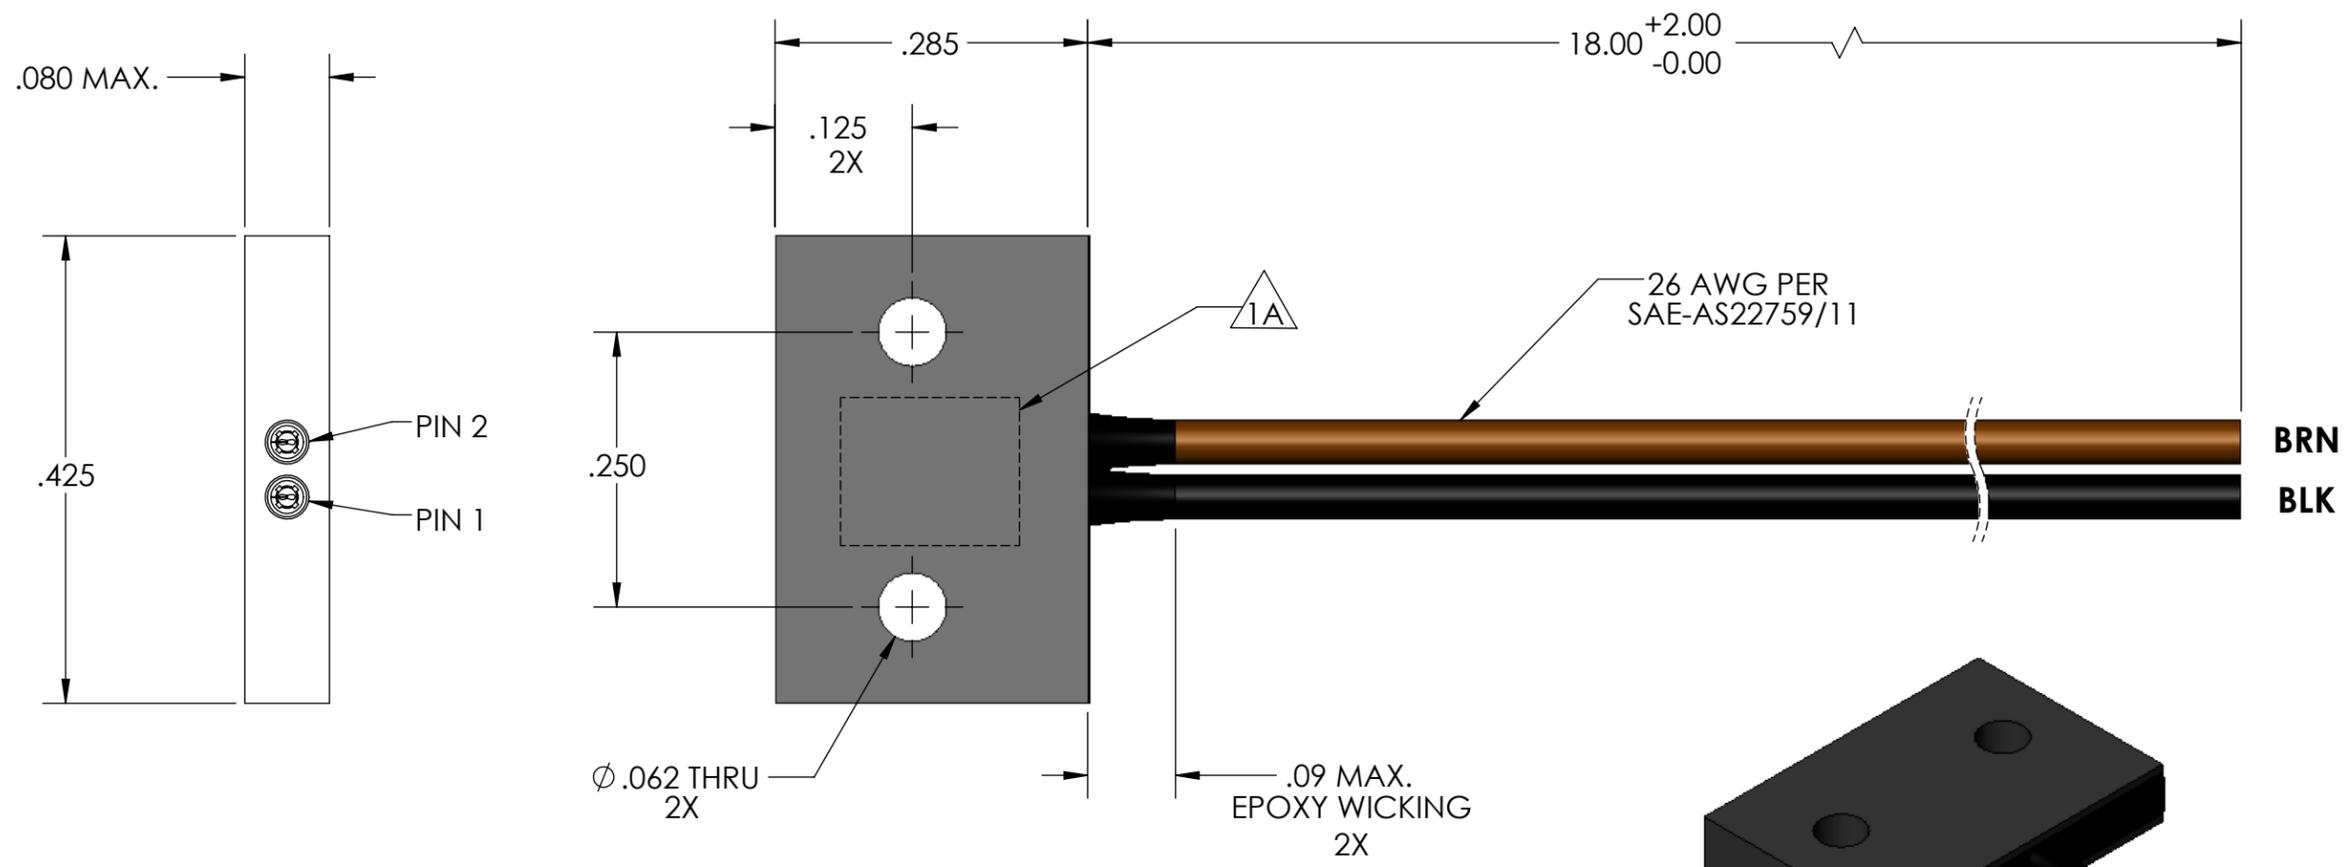

- 4. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.
- 3. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMPS MAX.
DWV: 600 VAC
TEMPERATURE RATING: 125° C

2 MATERIALS:
INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM-B488
WIRE: 26 AWG PER SAE-AS22759/11, COLOR CODE: PER MIL-STD-681

1. MARKING:
1A DATE CODE
1B. BAG AND TAG WITH "UMI", DATE CODE, UMI PART NUMBER, UMI WORKORDER NUMBER

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE IN INCHES	SCALE 6:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 4/30/18	TITLE: MICRO STRIP CONNECTOR, SR02P4-26M5-18.0		
		CHECKED BY & DATE DW 4/30/18	MATERIAL: 2	ENG PROJECT #: E374	
		APPROVED BY & DATE DW 4/30/18	PART NO. 837021064	DRAWING NO. SD-837021064	
	ULTI-MATE CAGE CODE 58967	CAD FILE NAME SD-837021064.SLDDRW	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		