

10

9

8

7

6

5

4

3

2

SD-837021510

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	1/22/19	UMI7001	DU	DW
A	A	2/8/19	UMI7032	DW	DW

F



E

D

C

B

A

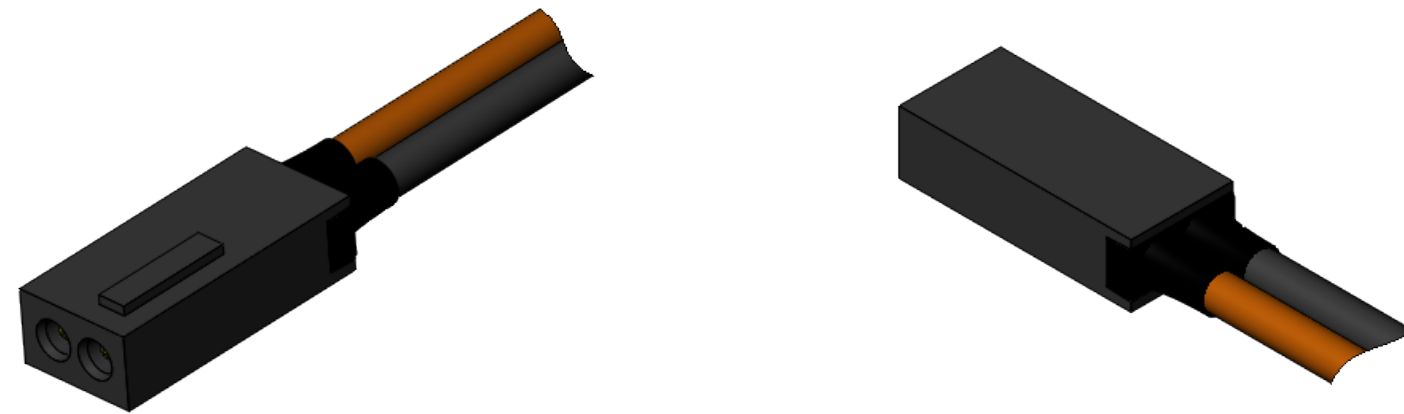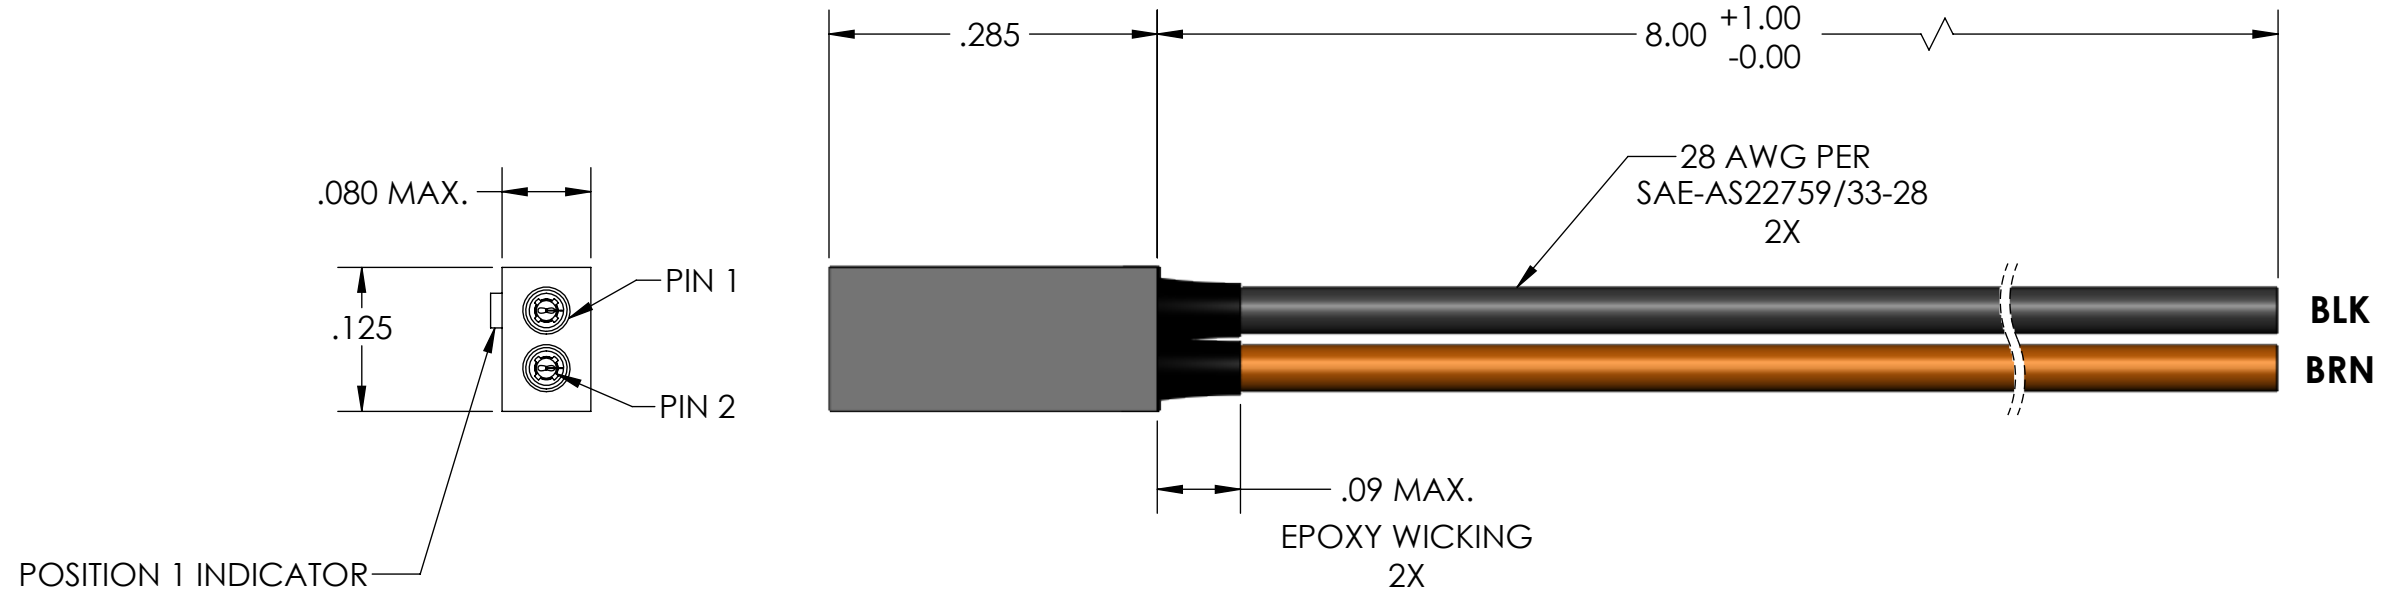

4. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.

3. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3 AMP MAX.
 DWV: 600 VAC
 TEMPERATURE RATING: -55°C TO 125°C

2 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM-B488
 28 AWG WIRES: PER SAE-AS22759/33-28, COLOR CODE: PER MIL-STD-681

1. MARKING: BAG AND TAG WITH "UMI", DATE CODE, UMI PART NUMBER, UMI WORK ORDER NUMBER

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE 6:1	DWG SIZE B	THIRD ANGLE PROJECTION 	REVISE ON CAD ONLY		
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 1/22/19		TITLE: MICRO STRIP CONNECTOR, SR02P0-28Y5-8.0			
		CHECKED BY & DATE SEE ECN		MATERIAL: 	ENG PROJECT #: NONE		
		APPROVED BY & DATE SEE ECN		PART NO. 837021510	DRAWING NO. SD-837021510	SHEET NO. 1 of 1	
	ULTI-MATE CAGE CODE 58967	CAD FILE NAME SD-837021510.SLDDRW		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			
				PART REV. A			