

10

9

8

7

6

5

4

3

2

SD-837021918

REVISIONS

PART REV.	DWG. ISSUE	DATE	ECN NO.	APPVD. BY	REL. BY
-	A	2/11/2020	UMI7392	JA	DW
A	B	4/9/2020	UMI7453	JA	DW

F



E

D

C

B

A

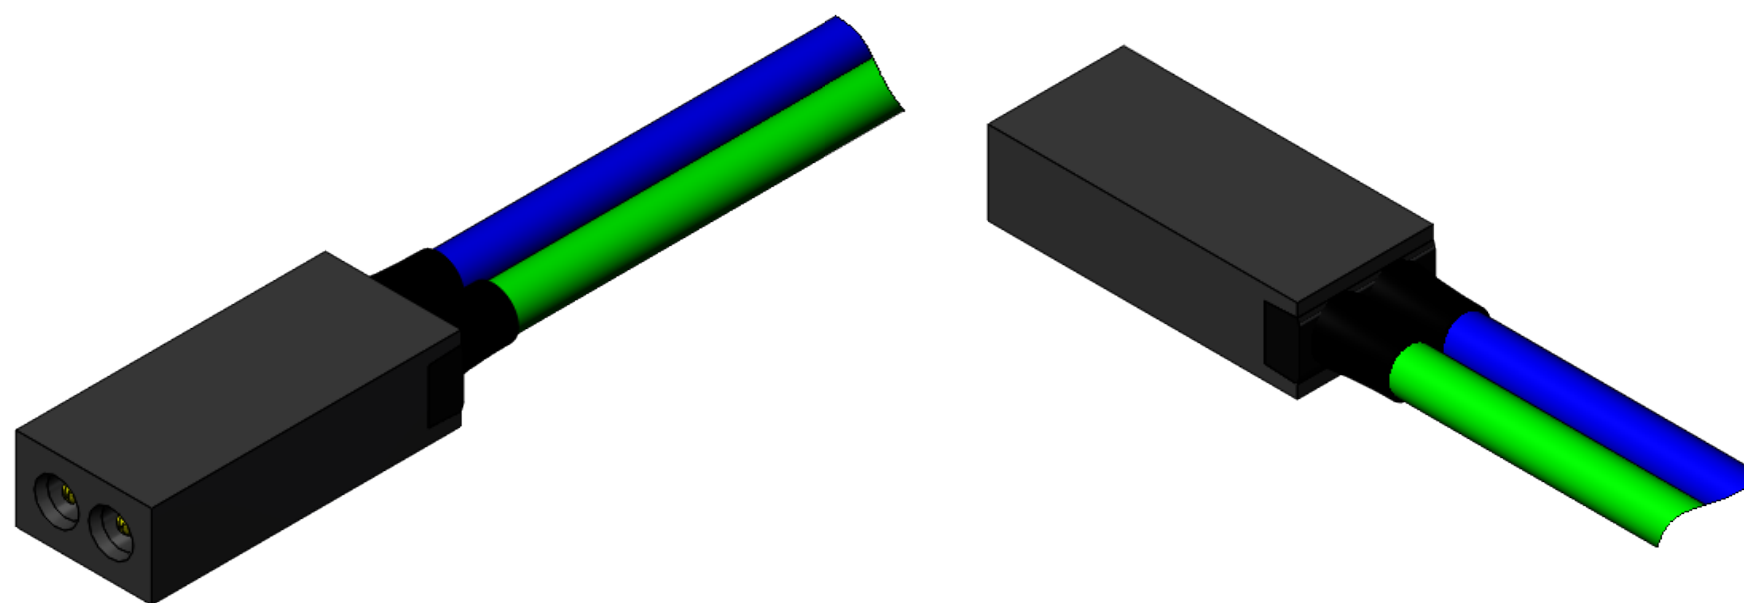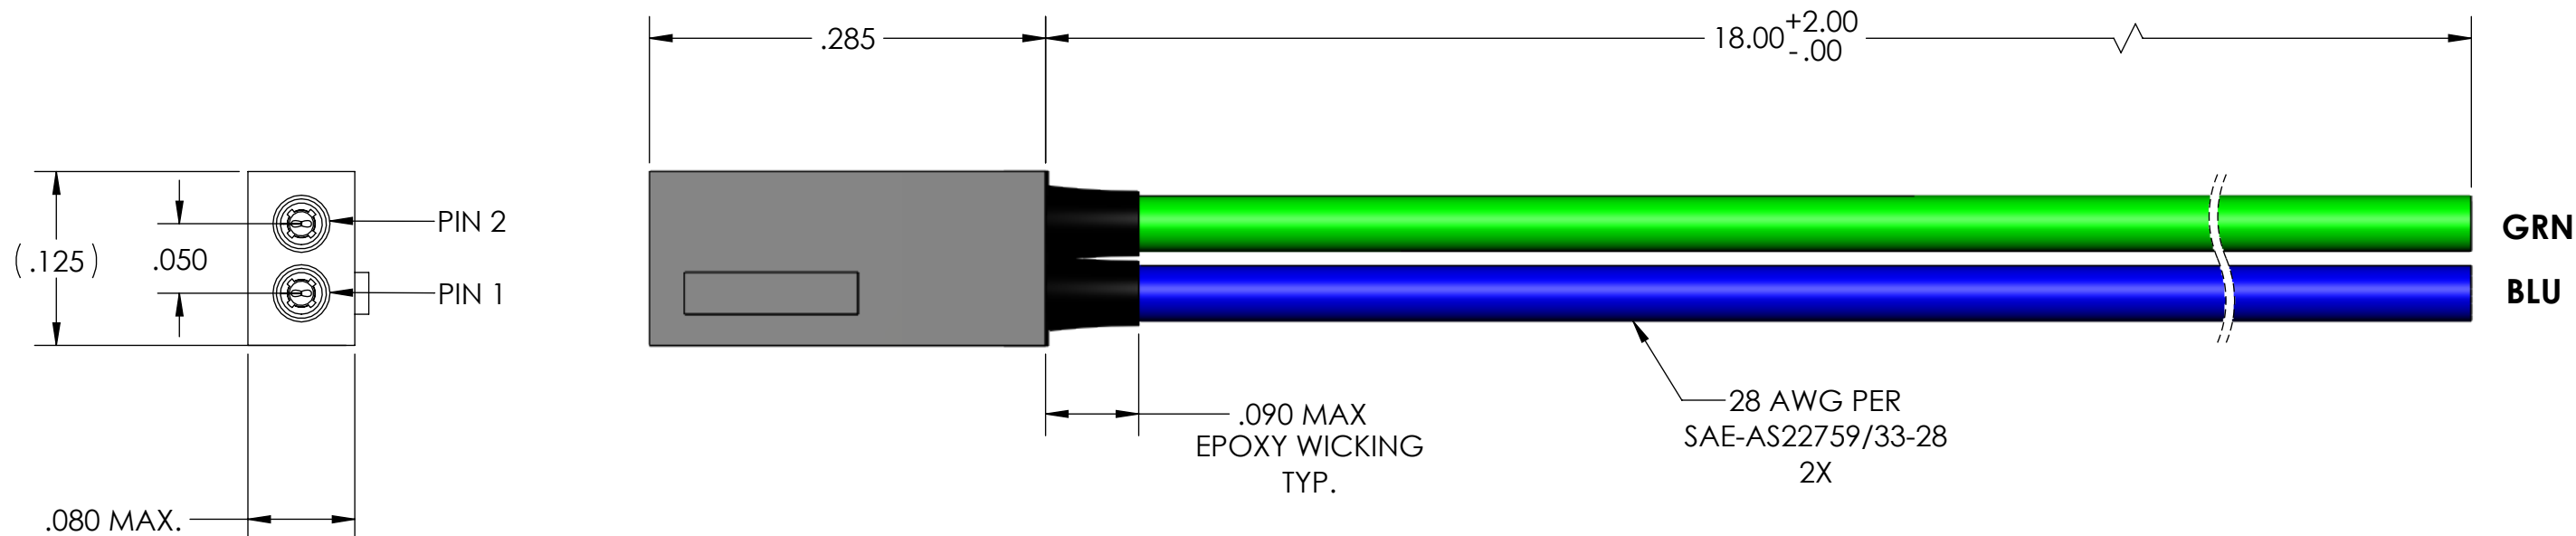

4. CONTACT HEIGHTS ARE TO BE PER QA-STD-101
 3. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3 AMPS MAX.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 DWV: 600 VAC
 TEMPERATURE RATING: -55°C TO 125°C

2 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 PIN CONTACTS: C17200 BERYLLIUM COPPER ASTM B194, GOLD PLATED PER ASTM B488
 WIRE: 28 AWG PER SAE-AS22759/33-28, COLOR CODE: PER MIL-STD-681

1 MARKINGS:
 BAG AND TAG: "UMI", DATE CODE, UMI PART NUMBER, UMI WORK ORDER NUMBER

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS	UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE IN INCHES	SCALE 8 : 1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL C	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 1/30/20	TITLE: MICRO STRIP CONNECTOR, PIN, SR02P0-28Y5-18.0		
MAJOR ▲	ULTI-MATE CAGE CODE 58967	CHECKED BY & DATE SEE ECN	MATERIAL: 2	ENG PROJECT #: NONE	
NO SYMBOLS = MINOR DIMENSIONS		APPROVED BY & DATE SEE ECN	PART NO. 837021918	DRAWING NO. SD-837021918	
		CAD FILE NAME SD-837021918.sliddrw	PART NO. 837021918	DRAWING NO. SD-837021918	SHEET NO. 1 of 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.					
					PART REV. A