

10

9

8

7

6

5

4

3

2

SD-837022000

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	9/10/18	UMI6864	DW	DW

F


E

D


C

B

A

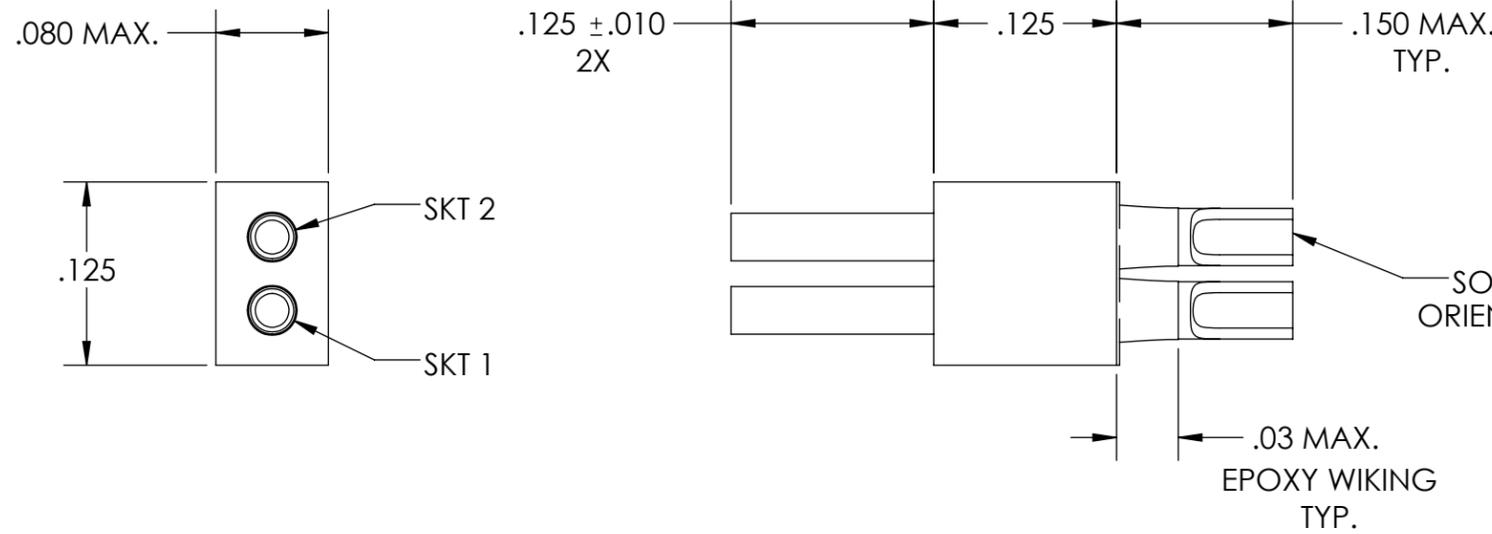

5
SOLDER CUPS ARE ORIENTATED AS SHOWN

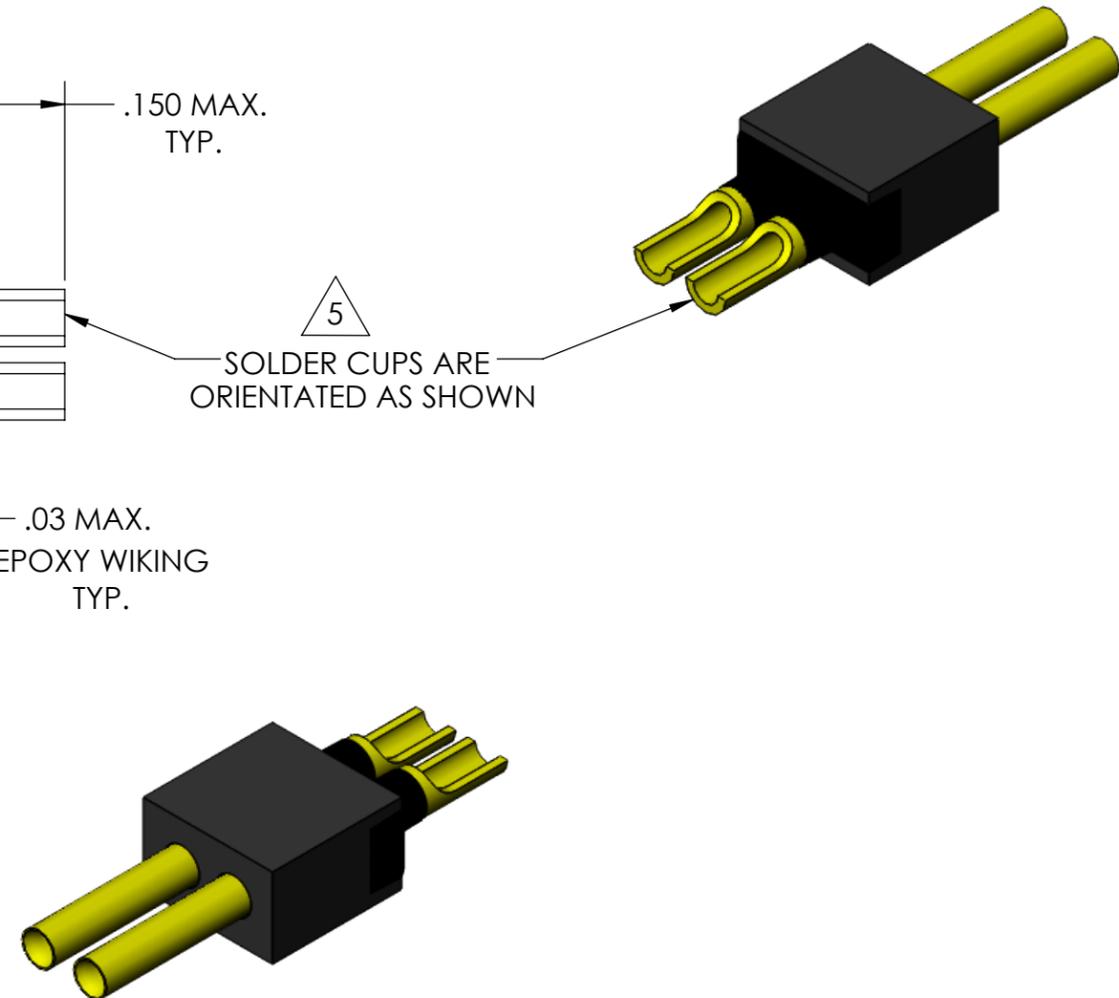

5 SOCKET SOLDER CUPS ARE ONLY GOOD FOR 26 AWG AND SMALLER WIRE.

4. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.

3. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMPS MAX.
DWV: 600 VAC
TEMPERATURE RATING: 125° C

2 MATERIALS:
STRIP INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
SOCKET SOLDER CUP CONTACTS: C21000 BRASS ALLOY PER ASTM B36,
GOLD PLATED PER ASTM-B488

1. BAG AND TAG WITH "UMI", DATE CODE, UMI PART NUMBER, UMI WORK ORDER NUMBER

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL C MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE 8:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 9/10/18		TITLE: MICRO STRIP CONNECTOR, SR02T0		
	ULTI-MATE CAGE CODE 58967	CHECKED BY & DATE DW 9/10/18		MATERIAL: 3	ENG PROJECT #: NONE	
		APPROVED BY & DATE DW 9/10/18		PART NO. 837022000	DRAWING NO. SD-837022000	
		CAD FILE NAME SD-837022000.SLDDRW			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	
						PART REV. -