



REVISIONS

| PART REV. | DWG. ISSUE | DATE | ECN NO. | APPVD. BY | REL. BY |
|-----------|------------|------------|---------|-----------|---------|
| - | - | 11/08/2013 | UMI5151 | DW | DW |
| | | | | | |

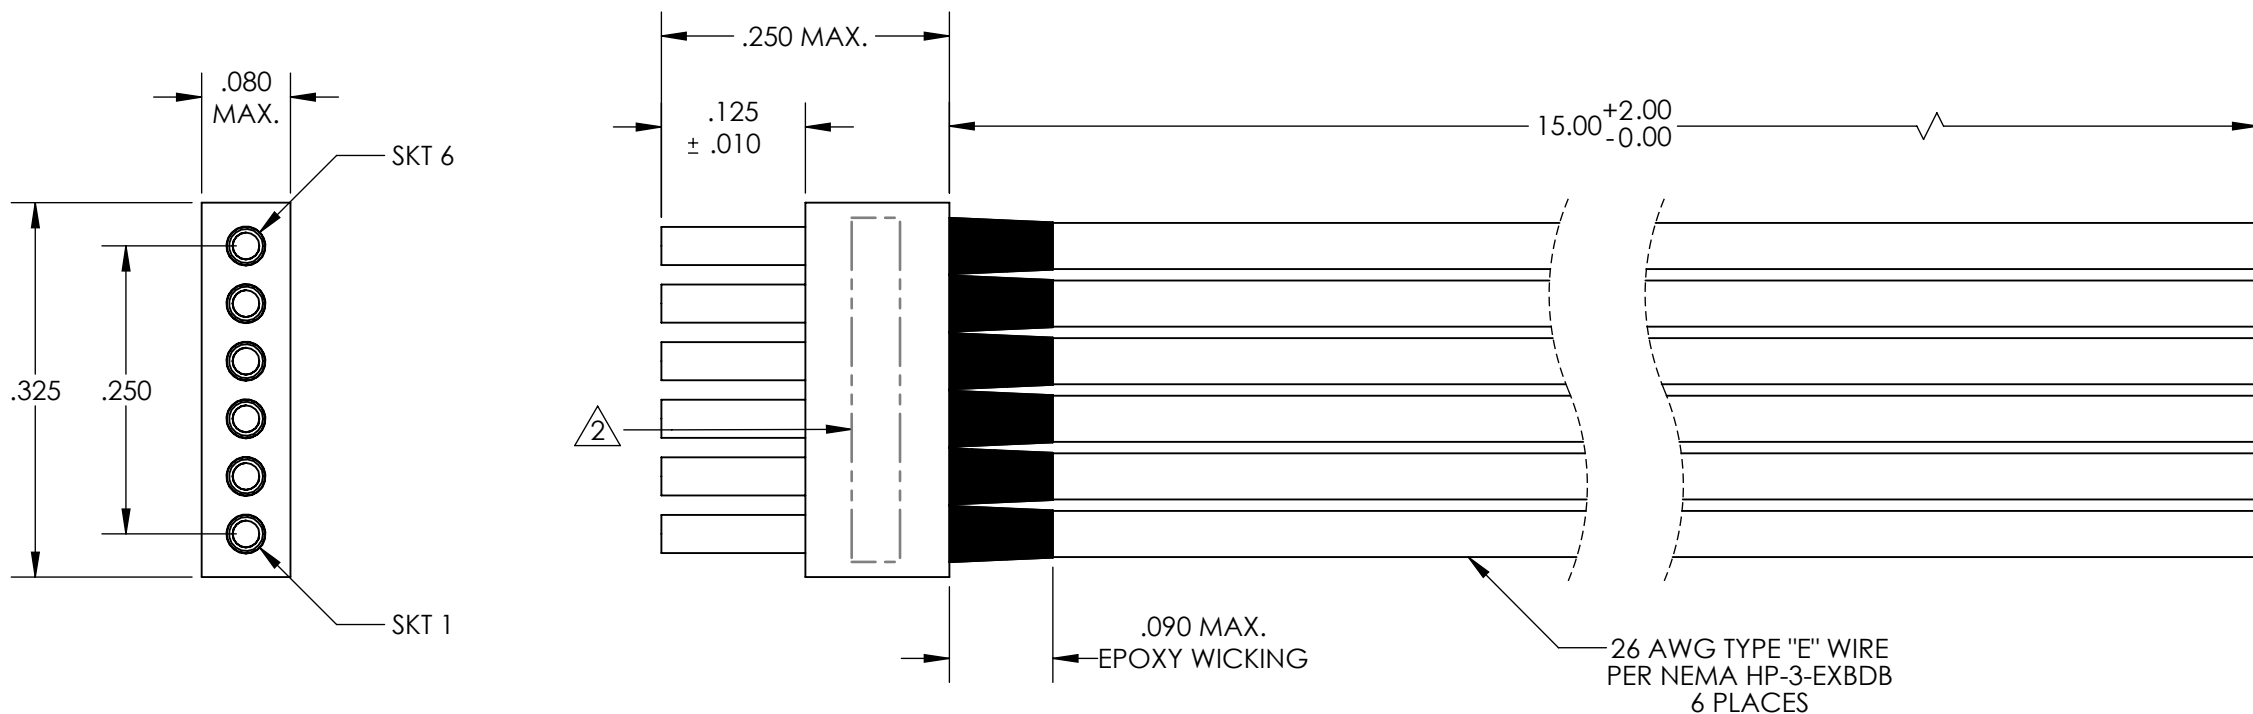

COLOR CODE

| | |
|---|-----|
| 1 | BLK |
| 2 | BRN |
| 3 | RED |
| 4 | ORG |
| 5 | YEL |
| 6 | GRN |

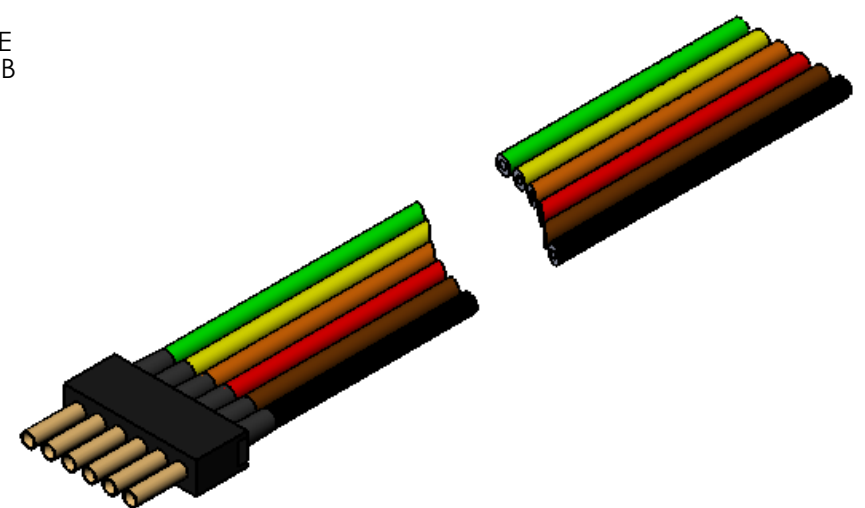

4. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3A MAX.
 INSULATION RESISTANCE: 5000 MΩ MIN.
 DWV: 600 VAC
 TEMPERATURE RATING: 125°C

3 MATERIALS:
 BODY: PPS PER MIL-M-24519 GST-40F, COLOR: BLK
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488

2 MARKINGS: UMI, UMI PART NO., AND DATE CODE, AS SPACE PERMITS
 1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 WHERE APPLICABLE

NOTES: UNLESS OTHERWISE SPECIFIED

| | | | | |
|---|---|--|---|----------------------------|
| QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOL = MINOR DIMENSION | UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2° ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967 | SCALE 6:1 DWG SIZE B | THIRD ANGLE PROJECTION REVISE ON CAD ONLY | |
| | DRAWN BY & DATE JB 11/08/2013 CHECKED BY & DATE DW 11-12-13 APPROVED BY & DATE DW 11-12-13 | TITLE MICRO-D STRIP CONNECTOR, RECEPTACLE, SIZE 6 SR06S0-26E5-15.0 | MATERIAL | ENG PROJECT # |
| | CAD FILENAME SD-837062290.slddrw | PART NO. 837062290 | DRAWING NO. SD-837062290 | SHEET NO. 1 OF 1 |
| | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. | | | PART REV. - |