
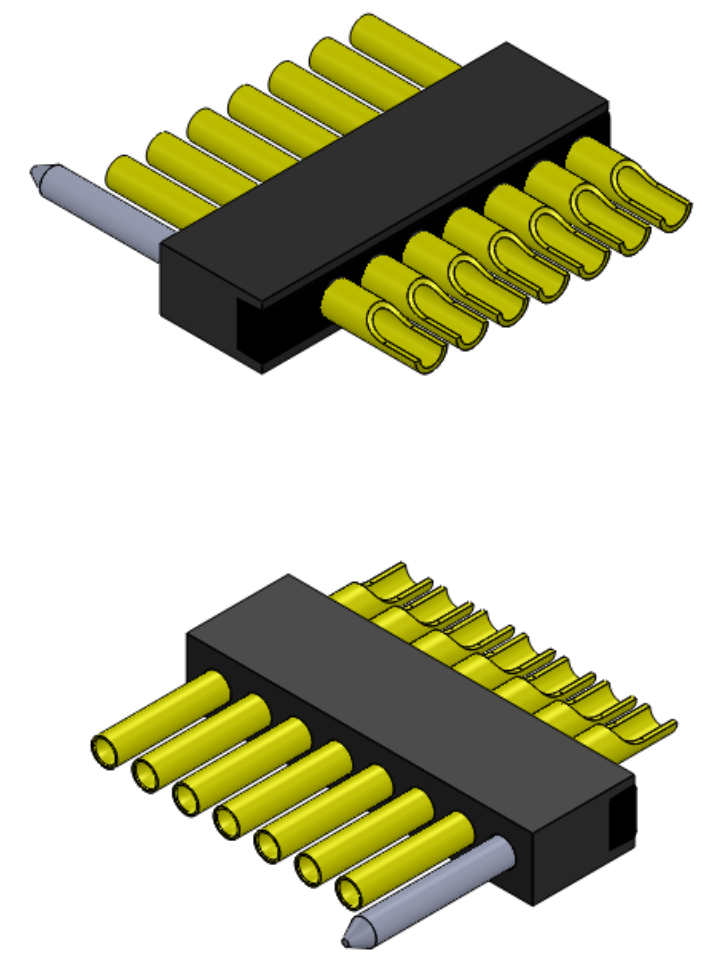


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	10/24/13	UMI5137	DW	DW

F
E
D
C
B
A

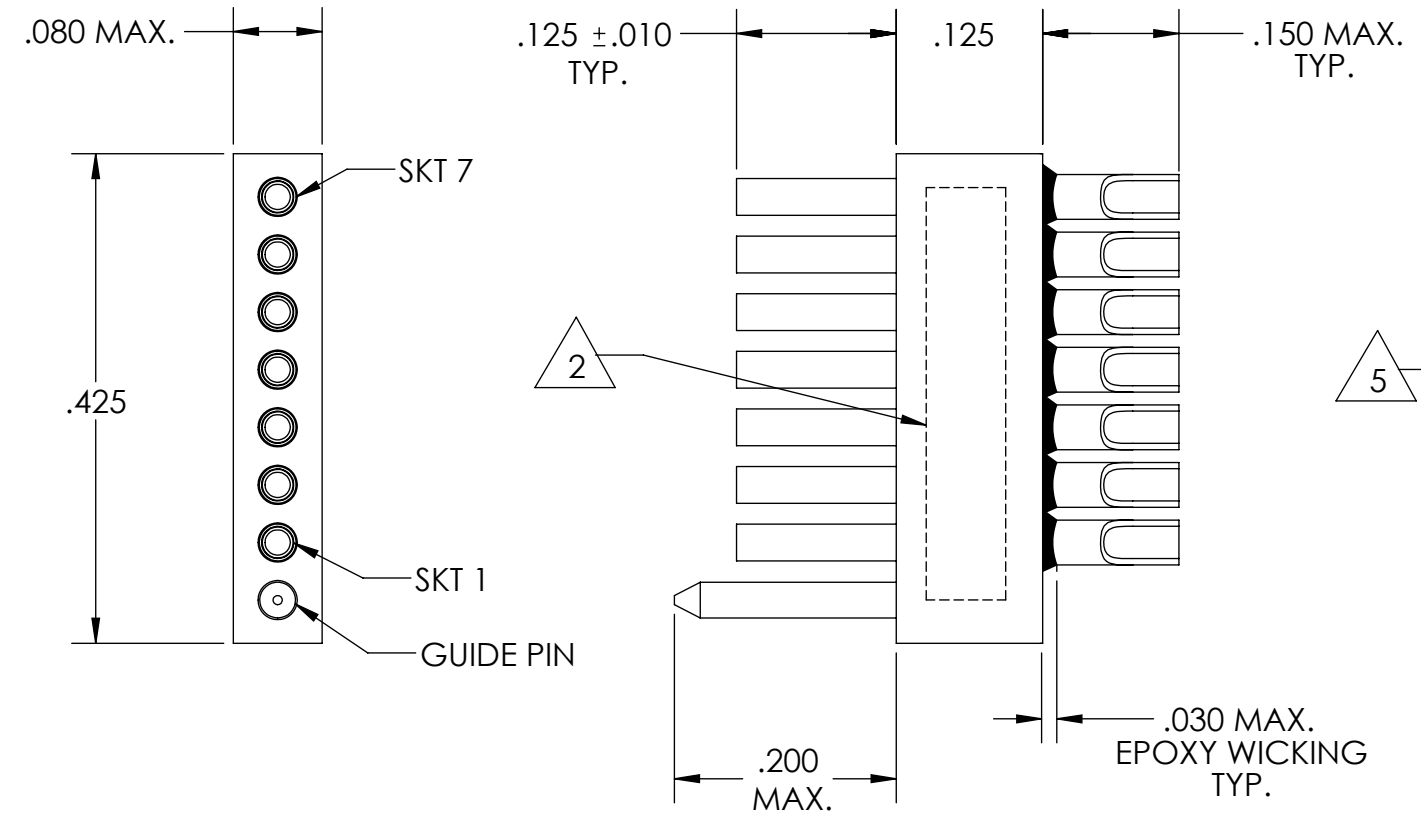

5 SOLDER CUPS ARE ORIENTED AS SHOWN.

4. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMPS MAX.
DWV: 600 VAC
TEMPERATURE RATING: 125° C

3 MATERIALS:
INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
SOCKET SOLDER CUP CONTACTS: C21000 BRASS ALLOY PER ASTM B36,
GOLD PLATED PER ASTM B488
GUIDE PIN: STAINLESS STEEL, PASSIVATED PER AMS 2700

2 MARKING: "UMI", DATE CODE, UMI PART NUMBER, (AS SPACE PERMITS).

1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 WHERE APPLICABLE.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL C MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE IN INCHES	SCALE 6:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 10/18/13		TITLE: MICRO STRIP CONNECTOR, 7 SOCKET, 1 GUIDE PIN, SOLDER CUPS, SR07T1			
		CHECKED BY & DATE DW 10/18/13		MATERIAL: 3	ENG PROJECT #: E128		
		APPROVED BY & DATE DW 10/18/13			DRAWING NO. SD-837072902		
	ULTI-MATE CAGE CODE 58967		CAD FILE NAME SD-837072902.DGN	PART NO. 837072902	SHEET NO. 1 of 1	PART REV. -	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.							