

10

9

8

7

6

5

4

3

2

SD-837085272

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	11/5/20	UMI7596	DU	DW

F


E

D


C

B

A

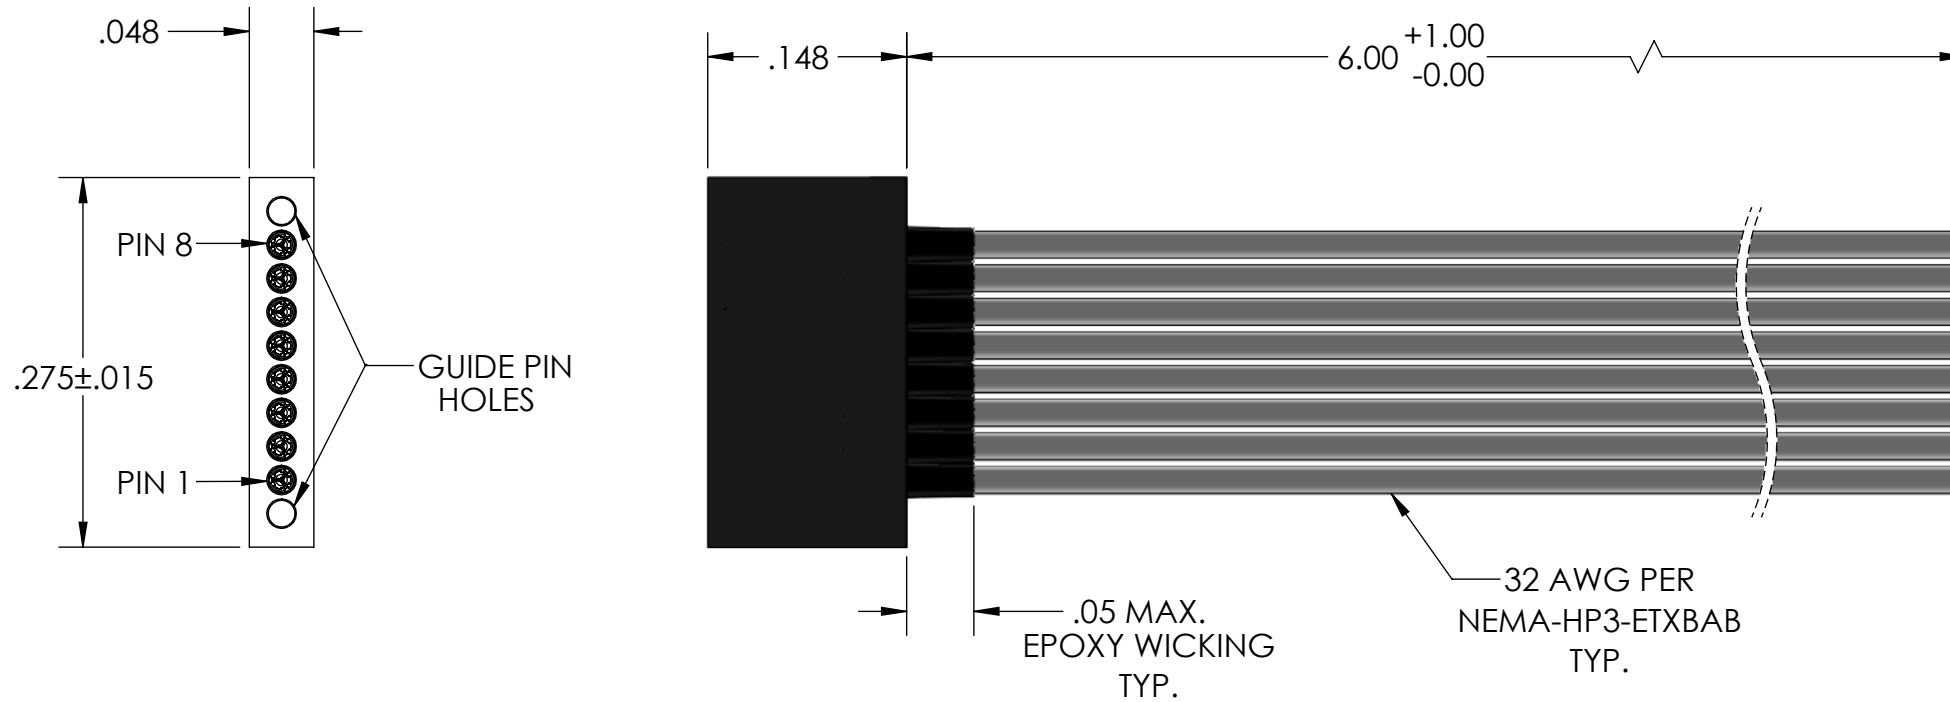

GUIDE PIN HOLE	
8	WHT
7	WHT
6	WHT
5	WHT
4	WHT
3	WHT
2	WHT
1	WHT
GUIDE PIN HOLE	

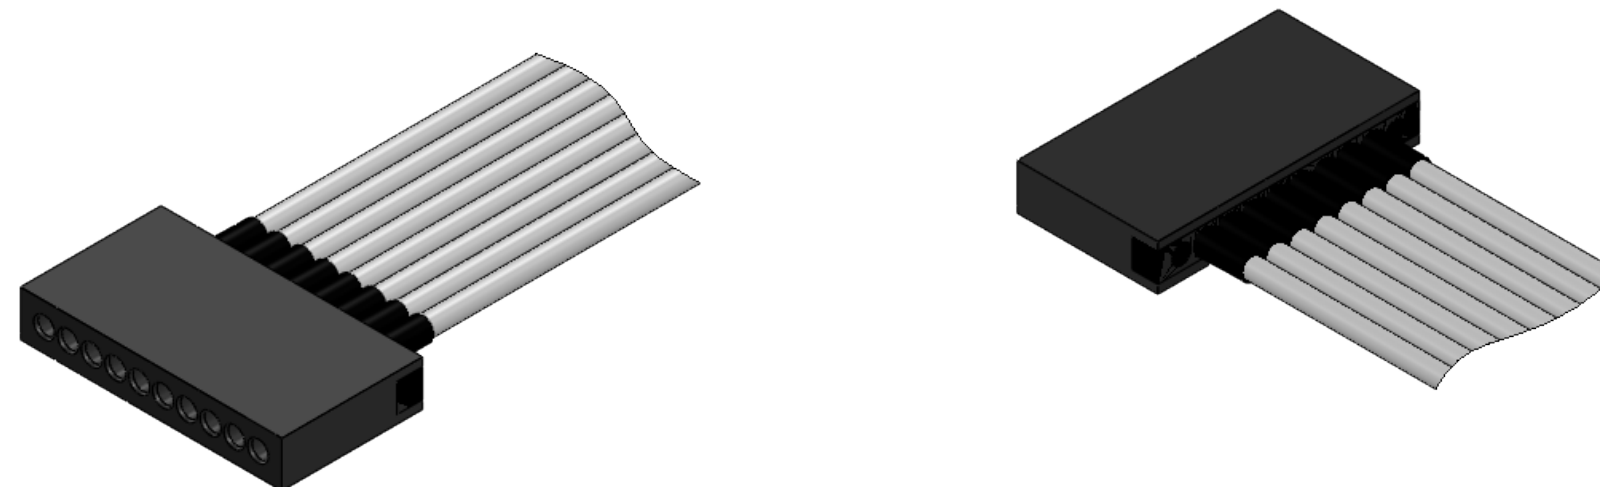

4. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.

3. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 1 AMP MAX.
DWV: 250 VAC
TEMPERATURE RATING: -55°C TO 125°C

2 MATERIALS:
INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B14, GOLD PLATED PER ASTM-B488
32 AWG WIRES: PER NEMA HP3-ETXBAB, COLOR CODE: ALL WHITE

1. MARKING: BAG AND TAG WITH "UMI", DATE CODE, UMI PART NUMBER, UMI WORK ORDER NUMBER

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION 	REVISE ON CAD ONLY		
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 11/5/20	TITLE: NANO STRIP CONNECTOR ASSEMBLY, NSR-08P2-32F1-6.0		MATERIAL: 	ENG PROJECT #: NONE	
	ULTI-MATE CAGE CODE 58967	CHECKED BY & DATE DW 11/5/20	PART NO. 837085272		DRAWING NO. SD-837085272	SHEET NO. 1 of 1	
		APPROVED BY & DATE DW 11/5/20	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			PART REV. -	
		CAD FILE NAME SD-837085272.SLDDRW					