


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	9-19-14	UMI 5425	DW	DW

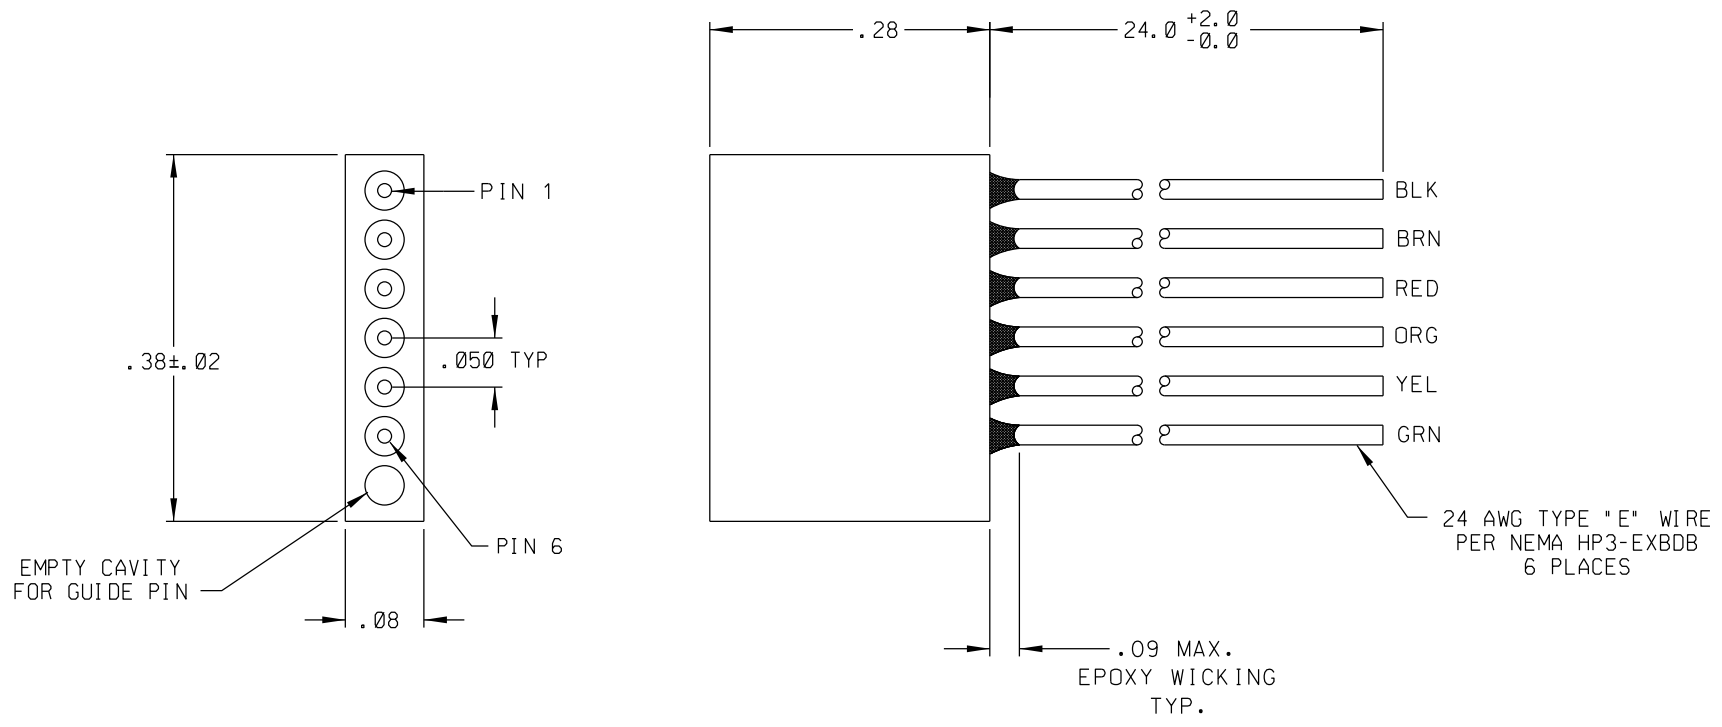

3. PERFORMANCE SPECIFICATIONS (AT AMBIENT TEMPERATURE):
 CURRENT RATING: 3 AMPS MAX
 INSULATION RESISTANCE: 5000 MEGOHMS MIN
 DWV: 600 VAC
 TEMPERATURE RATING: 200°C

2. MATERIAL:
 HOUSING: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 PIN CONTACTS: C17410 BERYLLIUM COPPER PER ASTM B768,
 GOLD PLATED PER ASTM B488

1. MARKING: DATE CODE

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL SPECIAL KEY	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 8:1 DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	DRAWN BY & DATE DW 9-19-14	TITLE: STRIP CONNECTOR, PLUG, 6 POSITION, WIRED, GUIDE PIN HOLE SR06P1-24E5-24.0-HT		MATERIAL:	
		CHECKED BY & DATE SEE ECN	APPROVED BY & DATE SEE ECN	Ulti-Mate Connector Inc.		SHEET NO. 1 OF 1
		CAD FILENAME SD-437061 901.DGN	PART NO. 437061 901	DRAWING NO. SD-437061 901	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	