
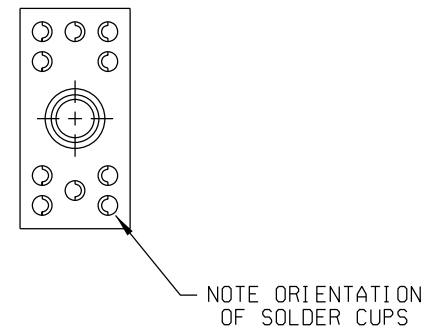


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
A	A	8-23-10	UMI 4145	DW	DW
A	B	10-18-16	UMI 6126	DW	DW

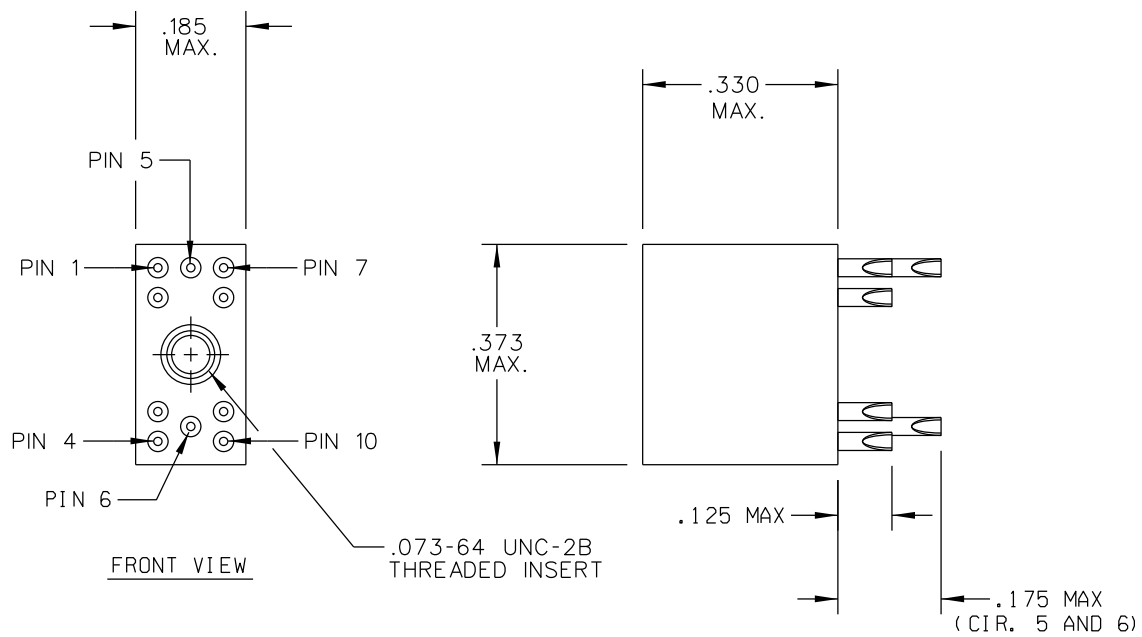

2 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 PIN CONTACT: C17200 BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 INSERT: STAINLESS STEEL, PASSIVATED PER AMS-2700

1. MARKING: UMI, DATE CODE, UMIP/N.

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 8-20-10		TITLE: CONNECTOR ASSEMBLY, JSBR-10NS	
MAJOR	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	CHECKED BY & DATE SEE ECN		MATERIAL: Uti-Mate Connector Inc.	
NO SYMBOL = MINOR DIMENSION		APPROVED BY & DATE SEE ECN		CAD FILENAME SD-838112000.DGN	PART NO. 838112000
	Uti-Mate CAGE CODE 58967	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			DRAWING NO. SD-838112000
				SHEET NO. 1 OF 1	PART REV A